

FLOS

A1352009 Matte White

2097/18 (clear bulbs)

Designed by Gino Sarfatti, 2019



LED retrofit - 18 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, matte black, matte white or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607054642
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Number of heads	18
Power (W)	15

Physical

Colour	Matte White
Length (mm)	670
Cord length (mm)	2800
Net weight (kg)	3.27
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.02
IP internal	20

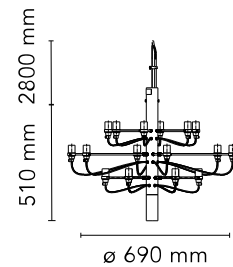

Download

[Mounting instructions](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

FLOS

A1352057 Chrome

2097/18 (clear bulbs)

Designed by Gino Sarfatti, 2019



LED retrofit - 18 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, matt black or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000403
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Number of heads	18
Power (W)	15

Physical

Colour	Chrome
Length (mm)	670
Cord length (mm)	2800
Net weight (kg)	3.27
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.02
IP internal	20

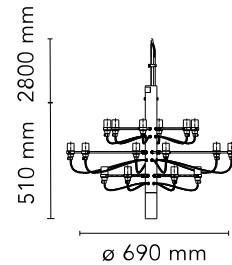

Download

- [Mounting instructions](#)  PDF
- [Spare Parts](#)  PDF




Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF25316

LED Frosted Lamp 2,7W E14
150lm 2700K Dimmable T26
Dimmable



NOT INCLUDED

RF28422


LED Clear Lamp 2W E14 220-240
2200K T26 Dimmable



NOT INCLUDED

RF28889

LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (Set 20pcs)




INCLUDED

RF28890

LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 20pcs)

Spare Parts

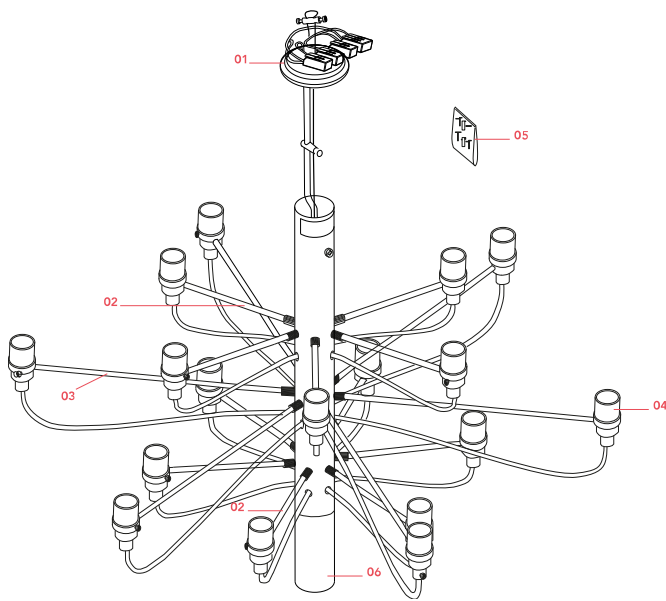

- | | | |
|-----|---------------------------|-----------|
| 01. | Ceiling rose | RL7060800 |
| 02. | Chrome short arm (200mm) | RL7060457 |
| 03. | Chrome Medium Arm (310mm) | RF33863 |
| 04. | 2097 E14 lamp holder | RL7050100 |
| 05. | Chrome screw kit | RL7050757 |
| 06. | Chrome lower cap | RL7050900 |

DOWNLOAD



RL7060800
Ceiling rose



RL7060457
Chrome short arm (200mm)



RF33863
Chrome Medium Arm (310mm)



RL7050100
2097 E14 lamp holder



RL7050757
Chrome screw kit



RL7050900
Chrome lower cap

FLOS

■ A1402031 Matte Black

2097/30 (clear bulbs)

Designed by Gino Sarfatti, 1958



LED retrofit - 30 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications


EAN	8059607000427
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Number of heads	30
Power (W)	15

Physical

Colour	Matte Black
Length (mm)	880
Cord length (mm)	2800
Net weight (kg)	5.6
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.02
IP internal	20

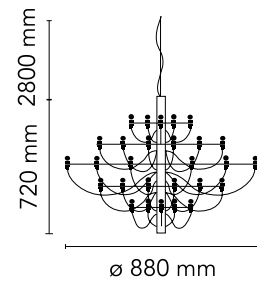

Download

[Mounting instructions](#)  PDF


[Spare Parts](#)  PDF

Photometric Files

[LDT / IES](#)  LDT


Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



Schematic light drawing



Luminous flux Luminaire
5500 lm


Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF25316

LED Frosted Lamp 2,7W E14
150lm 2700K Dimmable T26
Dimmable



NOT INCLUDED

RF28422


LED Clear Lamp 2W E14 220-240
2200K T26 Dimmable



NOT INCLUDED

RF28987

LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (set 32pcs)




INCLUDED

RF28988

LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 32pcs)

Spare Parts

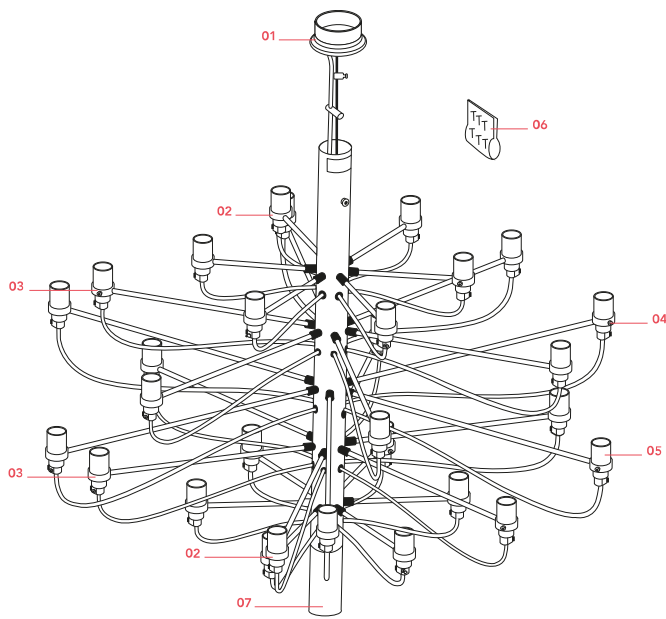

- | | | |
|-----|-------------------------------|-----------|
| 01. | Ceiling rose | RL7060800 |
| 02. | Opal black short arm (180mm) | RF22385 |
| 03. | Opal black medium arm (330mm) | RF22388 |
| 04. | Opal black long arm (430mm) | RF22389 |
| 05. | 2097 E14 lamp holder | RL7050100 |
| 06. | Opal black screw kit | RF1400100 |
| 07. | Opal black lower cap | RF1400200 |

DOWNLOAD



RL7060800

Ceiling rose



RF22385

Opal black short arm (180mm)



RF22388

Opal black medium arm
(330mm)



RF22389

Opal black long arm (430mm)



RL7050100

2097 E14 lamp holder



RF1400100

Opal black screw kit



RF1400200

Opal black lower cap

FLOS

A1402059 Brass

2097/30 (clear bulbs)

Designed by Gino Sarfatti, 1958



LED retrofit - 30 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000441
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Number of heads	30
Power (W)	15

Physical

Colour	Brass
Length (mm)	880
Cord length (mm)	2800
Net weight (kg)	5.6
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.02
IP internal	20

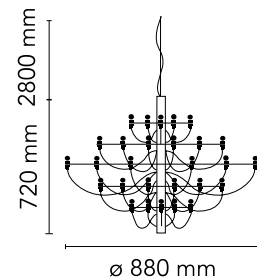

Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

Photometric Files

[LDT / IES](#) LDT


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Luminous flux Luminaire
5500 lm


Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF25316


LED Frosted Lamp 2,7W E14
150lm 2700K Dimmable T26
Dimmable



NOT INCLUDED

RF28422

LED Clear Lamp 2W E14 220-240
2200K T26 Dimmable



NOT INCLUDED

RF28987

LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (set 32pcs)




INCLUDED

RF28988

LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 32pcs)

Spare Parts

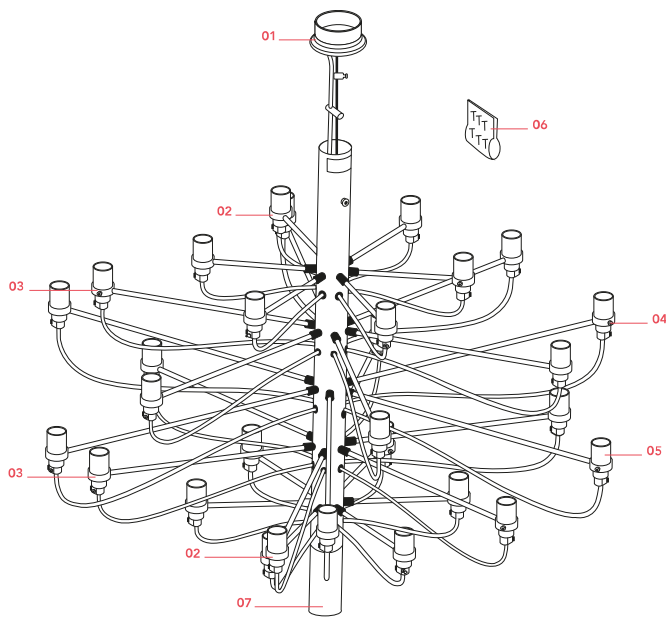

- | | | |
|-----|--------------------------|-----------|
| 01. | Ceiling rose | RL7060800 |
| 02. | Brass short arm (180mm) | RL7050459 |
| 03. | Brass medium arm (330mm) | RL7050559 |
| 04. | Brass long arm (430mm) | RL7050659 |
| 05. | 2097 E14 lamp holder | RL7050100 |
| 06. | Brass lower cap | RL7050759 |
| 07. | Brass lower cap | RL7050959 |

DOWNLOAD



RL7060800

Ceiling rose



RL7050459

Brass short arm (180mm)



RL7050559

Brass medium arm (330mm)



RL7050659

Brass long arm (430mm)



RL7050100

2097 E14 lamp holder



RL7050759

Brass lower cap



RL7050959

Brass lower cap

FLOS

A1502057 Chrome

2097/50 (clear bulbs)

Designed by Gino Sarfatti, 1958



LED retrofit - 50 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, black or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000496
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Number of heads	50
Power (W)	15

Physical

Colour	Chrome
Length (mm)	1000
Cord length (mm)	2800
Net weight (kg)	10.03
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.04
IP internal	20

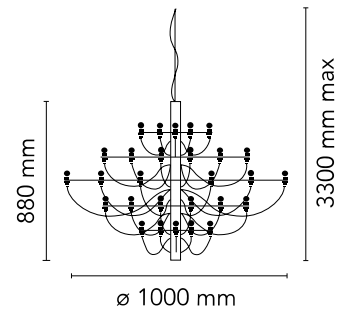

Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

Photometric Files


[LDT / IES](#) LDT

Technical Drawings

[2D](#) ZIP



Schematic light drawing




Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF25316

LED Frosted Lamp 2,7W E14
150lm 2700K Dimmable T26
Dimmable



NOT INCLUDED

RF28422


LED Clear Lamp 2W E14 220-240
2200K T26 Dimmable



NOT INCLUDED

RF28889


LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (Set 20pcs)



INCLUDED

RF28890


LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 20pcs)



NOT INCLUDED

RF28987

LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (set 32pcs)




INCLUDED

RF28988

LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 32pcs)

Spare Parts

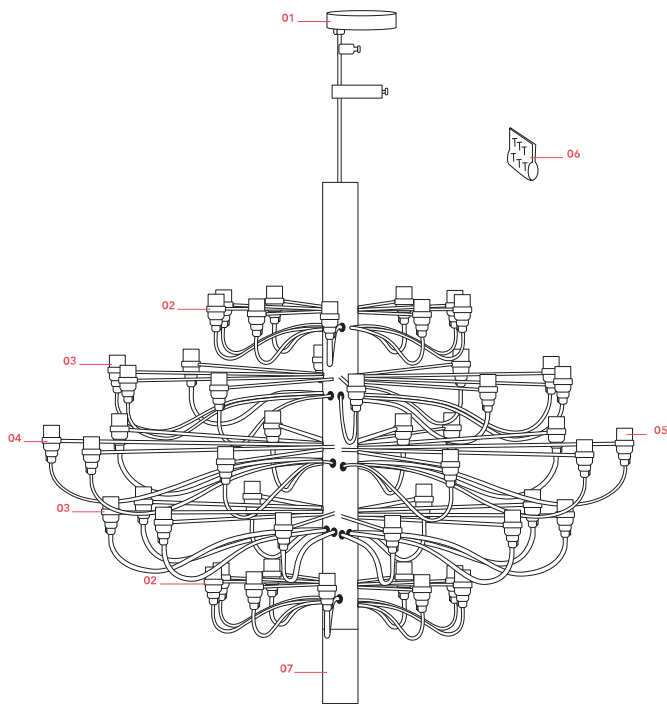

01.	Ceiling rose	RL7060700
02.	Chrome short arm (200mm)	RL7060457
03.	Chrome medium arm (375mm)	RL7060557
04.	Chrome long arm (475mm)	RL7060657
05.	2097 E14 lamp holder	RL7050100
06.	Chrome screw kit	RL7050757
07.	Chrome lower cap	RL7060157

DOWNLOAD



RL7060700

Ceiling rose



RL7060457

Chrome short arm (200mm)



RL7060557

Chrome medium arm (375mm)



RL7060657

Chrome long arm (475mm)



RL7050100

2097 E14 lamp holder



RL7050757

Chrome screw kit



RL7060157

Chrome lower cap

FLOS

A1502059 Brass

2097/50 (clear bulbs)

Designed by Gino Sarfatti, 1958



LED retrofit - 50 x 15W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, black or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607000502
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Iicos	IBS/F
Number of heads	50
Power (W)	15

Physical

Colour	Brass
Length (mm)	1000
Cord length (mm)	2800
Net weight (kg)	10.03
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.04
IP internal	20

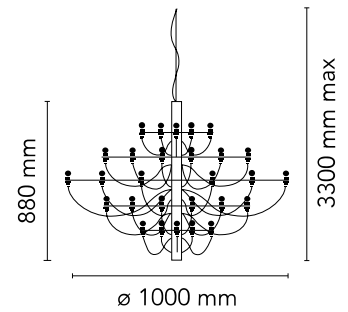

Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

Photometric Files


[LDT / IES](#)  LDT

Technical Drawings

[2D](#)  ZIP



Schematic light drawing



Luminous flux Luminaire
5500 lm


Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No


Bulbs



NOT INCLUDED

RF25316

LED Frosted Lamp 2,7W E14
150lm 2700K Dimmable T26
Dimmable



NOT INCLUDED

RF28422


LED Clear Lamp 2W E14 220-240
2200K T26 Dimmable



NOT INCLUDED

RF28889


LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (Set 20pcs)



INCLUDED

RF28890


LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 20pcs)



NOT INCLUDED

RF28987

LED Frosted Mini Lamp E14 2,7W
2700K Dimmable (set 32pcs)




INCLUDED

RF28988

LED Clear Mini Lamp E14 2W
2200K Dimmable (Set 32pcs)

Spare Parts

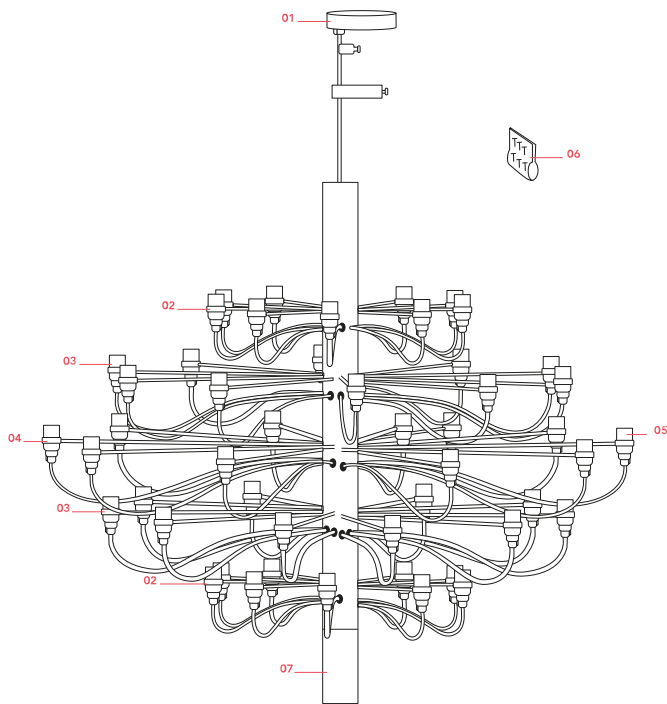

01.	Ceiling rose	RL7060700
02.	Brass short arm (200mm)	RL7060459
03.	Brass medium arm (375mm)	RL7060558
04.	Brass long arm (475mm)	RL7060659
05.	2097 E14 lamp holder	RL7050100
06.	Brass lower cap	RL7050759
07.	Brass lower cap	RL7060158

DOWNLOAD



RL7060700

Ceiling rose



RL7060459

Brass short arm (200mm)



RL7060558

Brass medium arm (375mm)



RL7060659

Brass long arm (475mm)



RL7050100

2097 E14 lamp holder



RL7050759

Brass lower cap



RL7060158

Brass lower cap

FLOS

A1552009 Matte White

2097/75 (clear bulbs)

Designed by Gino Sarfatti, 1958


LED retrofit - 75 x 3W



Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, matte black, matte white or golded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

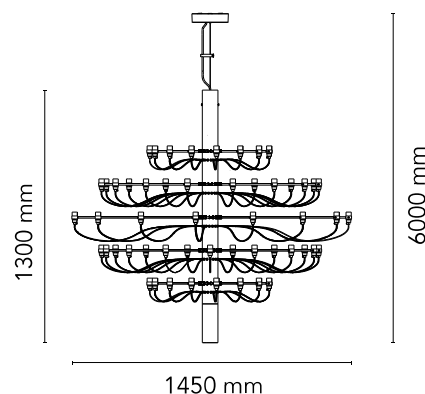

Main specifications

EAN	8059607057797
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Ilcos	IBS/F
Bulb finish	Clear
Number of heads	75
Power (W)	3

Physical

Colour	Matte White
Cord length (mm)	4700
Net weight (kg)	30
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.18
IP internal	20

Download

[Mounting instructions](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Batteries inside	No

FLOS

■ A1552031 Matte Black

2097/75 (clear bulbs)

Designed by Gino Sarfatti, 1958




LED retrofit - 75 x 3W

Suspension lamp providing diffused light. Steel central structure with brass arms, both available either chromium-plated, matte black, matte white or gilded. Steel ceiling fitting and rose.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

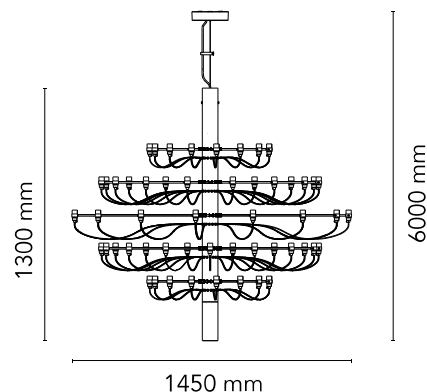

Main specifications

EAN	8059607057803
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	LED retrofit
Lamp holders	E14
Iicos	IBS/F
Bulb finish	Clear
Number of heads	75
Power (W)	3

Physical

Colour	Matte Black
Cord length (mm)	4700
Net weight (kg)	30
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.18
IP internal	20

Download

[Mounting instructions](#)



Photometric

Lighting type	Total
Light distribution	Asymmetric

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Batteries inside	No