

# FLOS



F9514044 Pink Cable/Gold Ring

## Wirering Pink

Designed by Formafantasma, 2018


16W - 712lm - 2700K - CRI> 90



Indirect light wall lighting device with body in calendered, extruded aluminium with galvanised or varnished finish. The special tangent cable, in coloured rubber, provides the power. The cable is fixed to the wall with ABS joints in the same finish as the ring. Dimming via switch pedal on the cable. Power supply on adapter with interchangeable plugs. Useful cable length is 2.5 metres.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Wall
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	16
System flux (lm)	712

### Physical

Colour	Pink Cable/Gold Ring
Length (mm)	310
Cord length (mm)	2500
Net weight (kg)	0.94
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.02
IP internal	20

### Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

### Photometric Files

[LDT / IES](#) LDT


### Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



## Schematic light drawing



## Photometric

Lighting type	Indirect
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90

## Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/24
Driver	Remote included
Dimmable	Yes
Dimming type	Electronic 24V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by an end-user

## Spare Parts

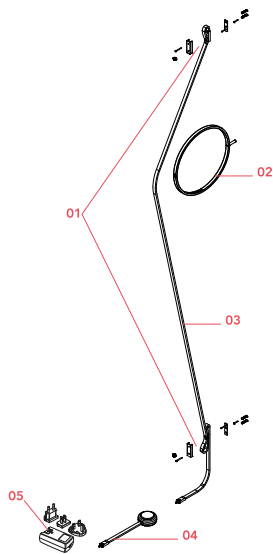

- |     |  |           |
|-----|--|-----------|
| 01. | Kit with screws, nuts and components     | RF9510400 |
| 02. | Ring assembly                            | RF26677   |
| 03. | Electrical mounting body assembly        | RF26651   |
| 04. | Electrical mounting assembly with dimmer | RF26646   |
| 05. | Black plug assembly kit & 24V driver     | RF3320100 |

**DOWNLOAD**



RF9510400  
Kit with screws, nuts and components



RF26677  
Ring assembly



RF26651  
Electrical mounting body assembly



RF26646  
Electrical mounting assembly with dimmer



RF3320100  
Black plug assembly kit & 24V driver