


# Wireflow Free

Design by Arik Levy

True to its name, Wireflow Free adapts easily to any environment. Its cables can be directed to form unexpected visual rhythms across a wall or ceiling, or to branch out from a central point and delineate specific activity zones within a space. Free offers maximum versatility in both form and function.

---

## Pendant

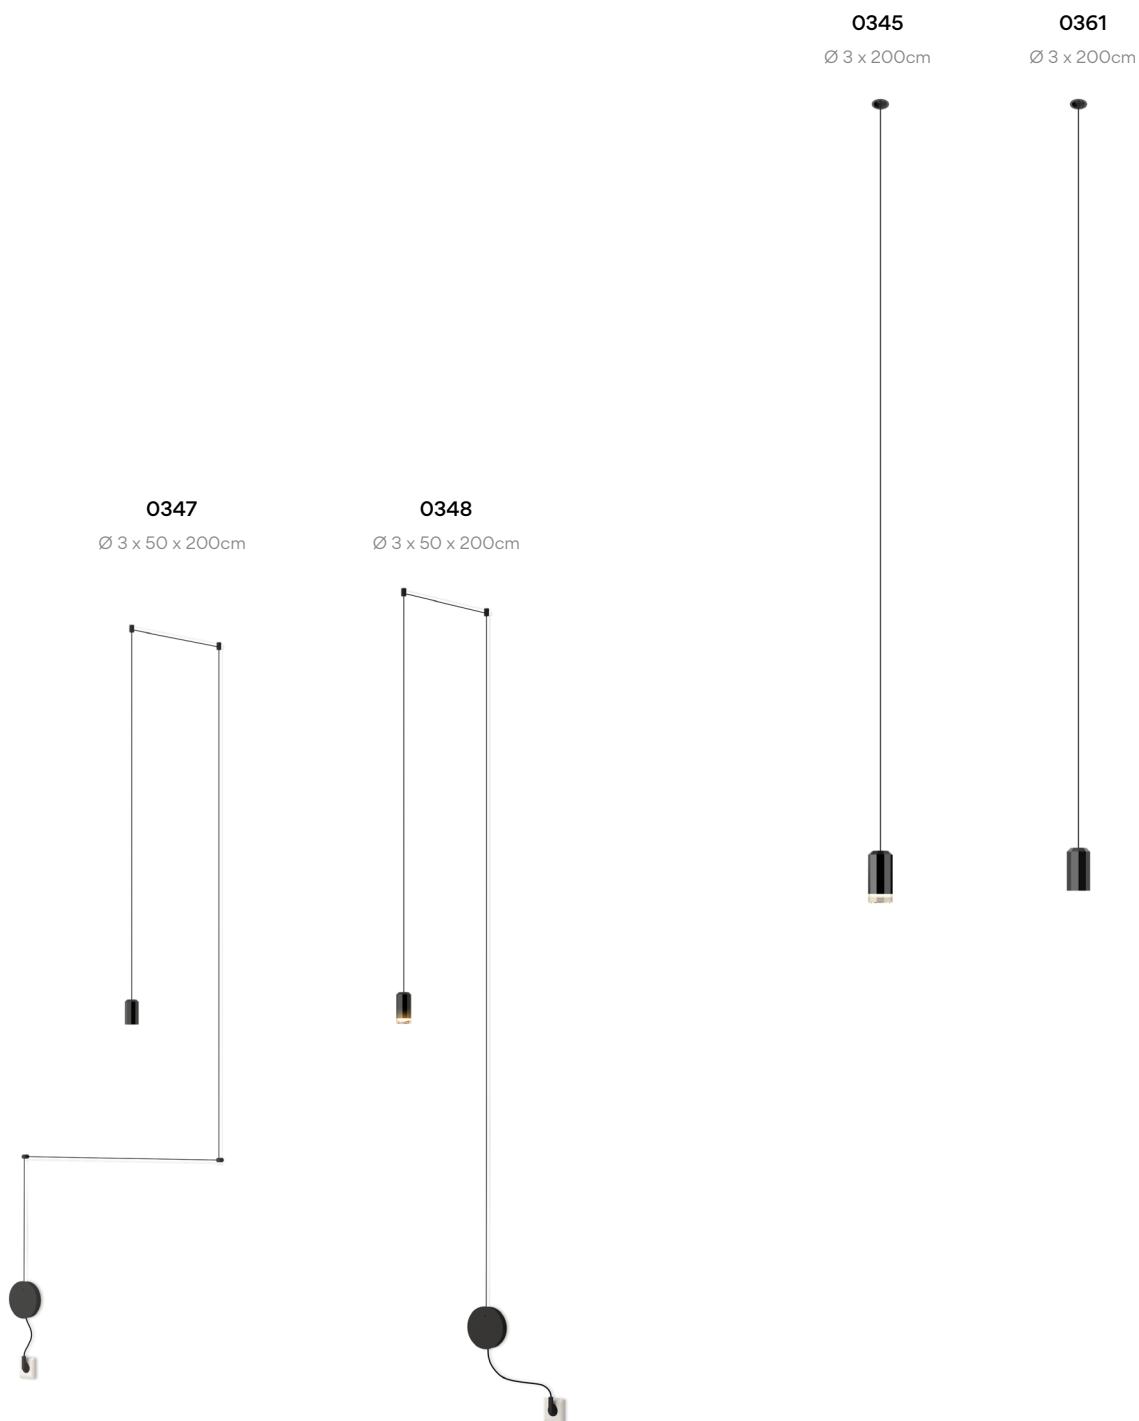


0345

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 04/ __ Black (RAL 9005)	/1 _ 2700 K - 485 lm D →	0345 __ / __
	/2 _ 3000 K - 485 lm	__ / _ 1 DALI-2
	/3 _ 3500 K - 500,3 lm E →	__ / _ B Push; 1-10V
	CRI >90	__ / _ Z Casambi



Select Electrical connection

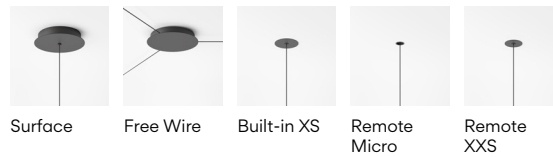

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Diffuser: Pressed-glass. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 700 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging

1 Box 0,25 x 0,42 x 0,42 m  
 Vol 0,0441 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 2,34 Kg


Notes

With pressed-glass diffuser.  
 Extra cable length.



0347

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 04/ __ Black (RAL 9005)	/1 _ 2700 K - 490 lm D →	0347 __ / 15 Push
	CRI >80	



Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging

1 Box 0,13 x 0,20 x 0,20 m  
 Vol 0,0055 m<sup>3</sup>  
 Gross weight 1,5 Kg Net weight 1,35 Kg


Notes

Without pressed-glass diffuser.  
 Electric cable 2,5 m. With plug.  
 Dimmer push button on the wall plate.



0348

<b>Finishes</b>	<b>LED Colour Temperature</b>	<b>Control</b>
● 04/ __ Black (RAL 9005)	/1 _ 2700 K - 490 lm D →	0348 04 / 15 Push
	CRI >80	



Materials

Diffuser: Pressed-glass. Body: Aluminum. Canopy: Steel. Ceiling supports: POM.

Light Source and electronics

1 x LED 4,5 W 350 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging

1 Box 0,26 x 0,26 x 0,26 m  
 Vol 0,0175 m<sup>3</sup>  
 Gross weight 1,9 Kg Net weight 1,71 Kg

Notes

With pressed-glass diffuser.  
 Electric cable 2,5 m. With plug.  
 Dimmer push button on the wall plate.




0361


Finishes  
 ● 04/ \_\_ Black  
 (RAL 9005)

LED Colour Temperature  
 /1 \_ 2700 K - 485 lm  
 D  
 /2 \_ 3000 K - 485 lm  
 /3 \_ 3500 K - 500,3 lm  
 E  
 CRI >90

Control  
 0361 \_\_ / \_\_  
 \_\_ / \_ 1 DALI-2  
 \_\_ / \_ B Push; 1-10V  
 \_\_ / \_ Z Casambi



⚡ Select Electrical connection

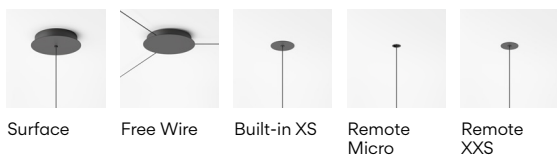

\_10 Surface  
 \_18 Free Wire  
 \_23 Built-in XS  
 \_31 Remote Micro  
 \_32 Remote XXS


Materials  
 Diffuser: PC-Polycarbonate. Body: Aluminum.  
 Canopy: Steel. Ceiling supports: POM.

Light Source and electronics  
 1 x LED 4,5 W 700 mA  
 Constant Current 350 mA  
 100~240V 50/60Hz

Packaging  
 1 Box 0,25 x 0,42 x 0,42 m  
 Vol 0,0441 m<sup>3</sup>  
 Gross weight 2,6 Kg Net weight 2,34 Kg

Notes  
 Without pressed-glass diffuser.  
 Additional cable length personalisation 16,00 €/m



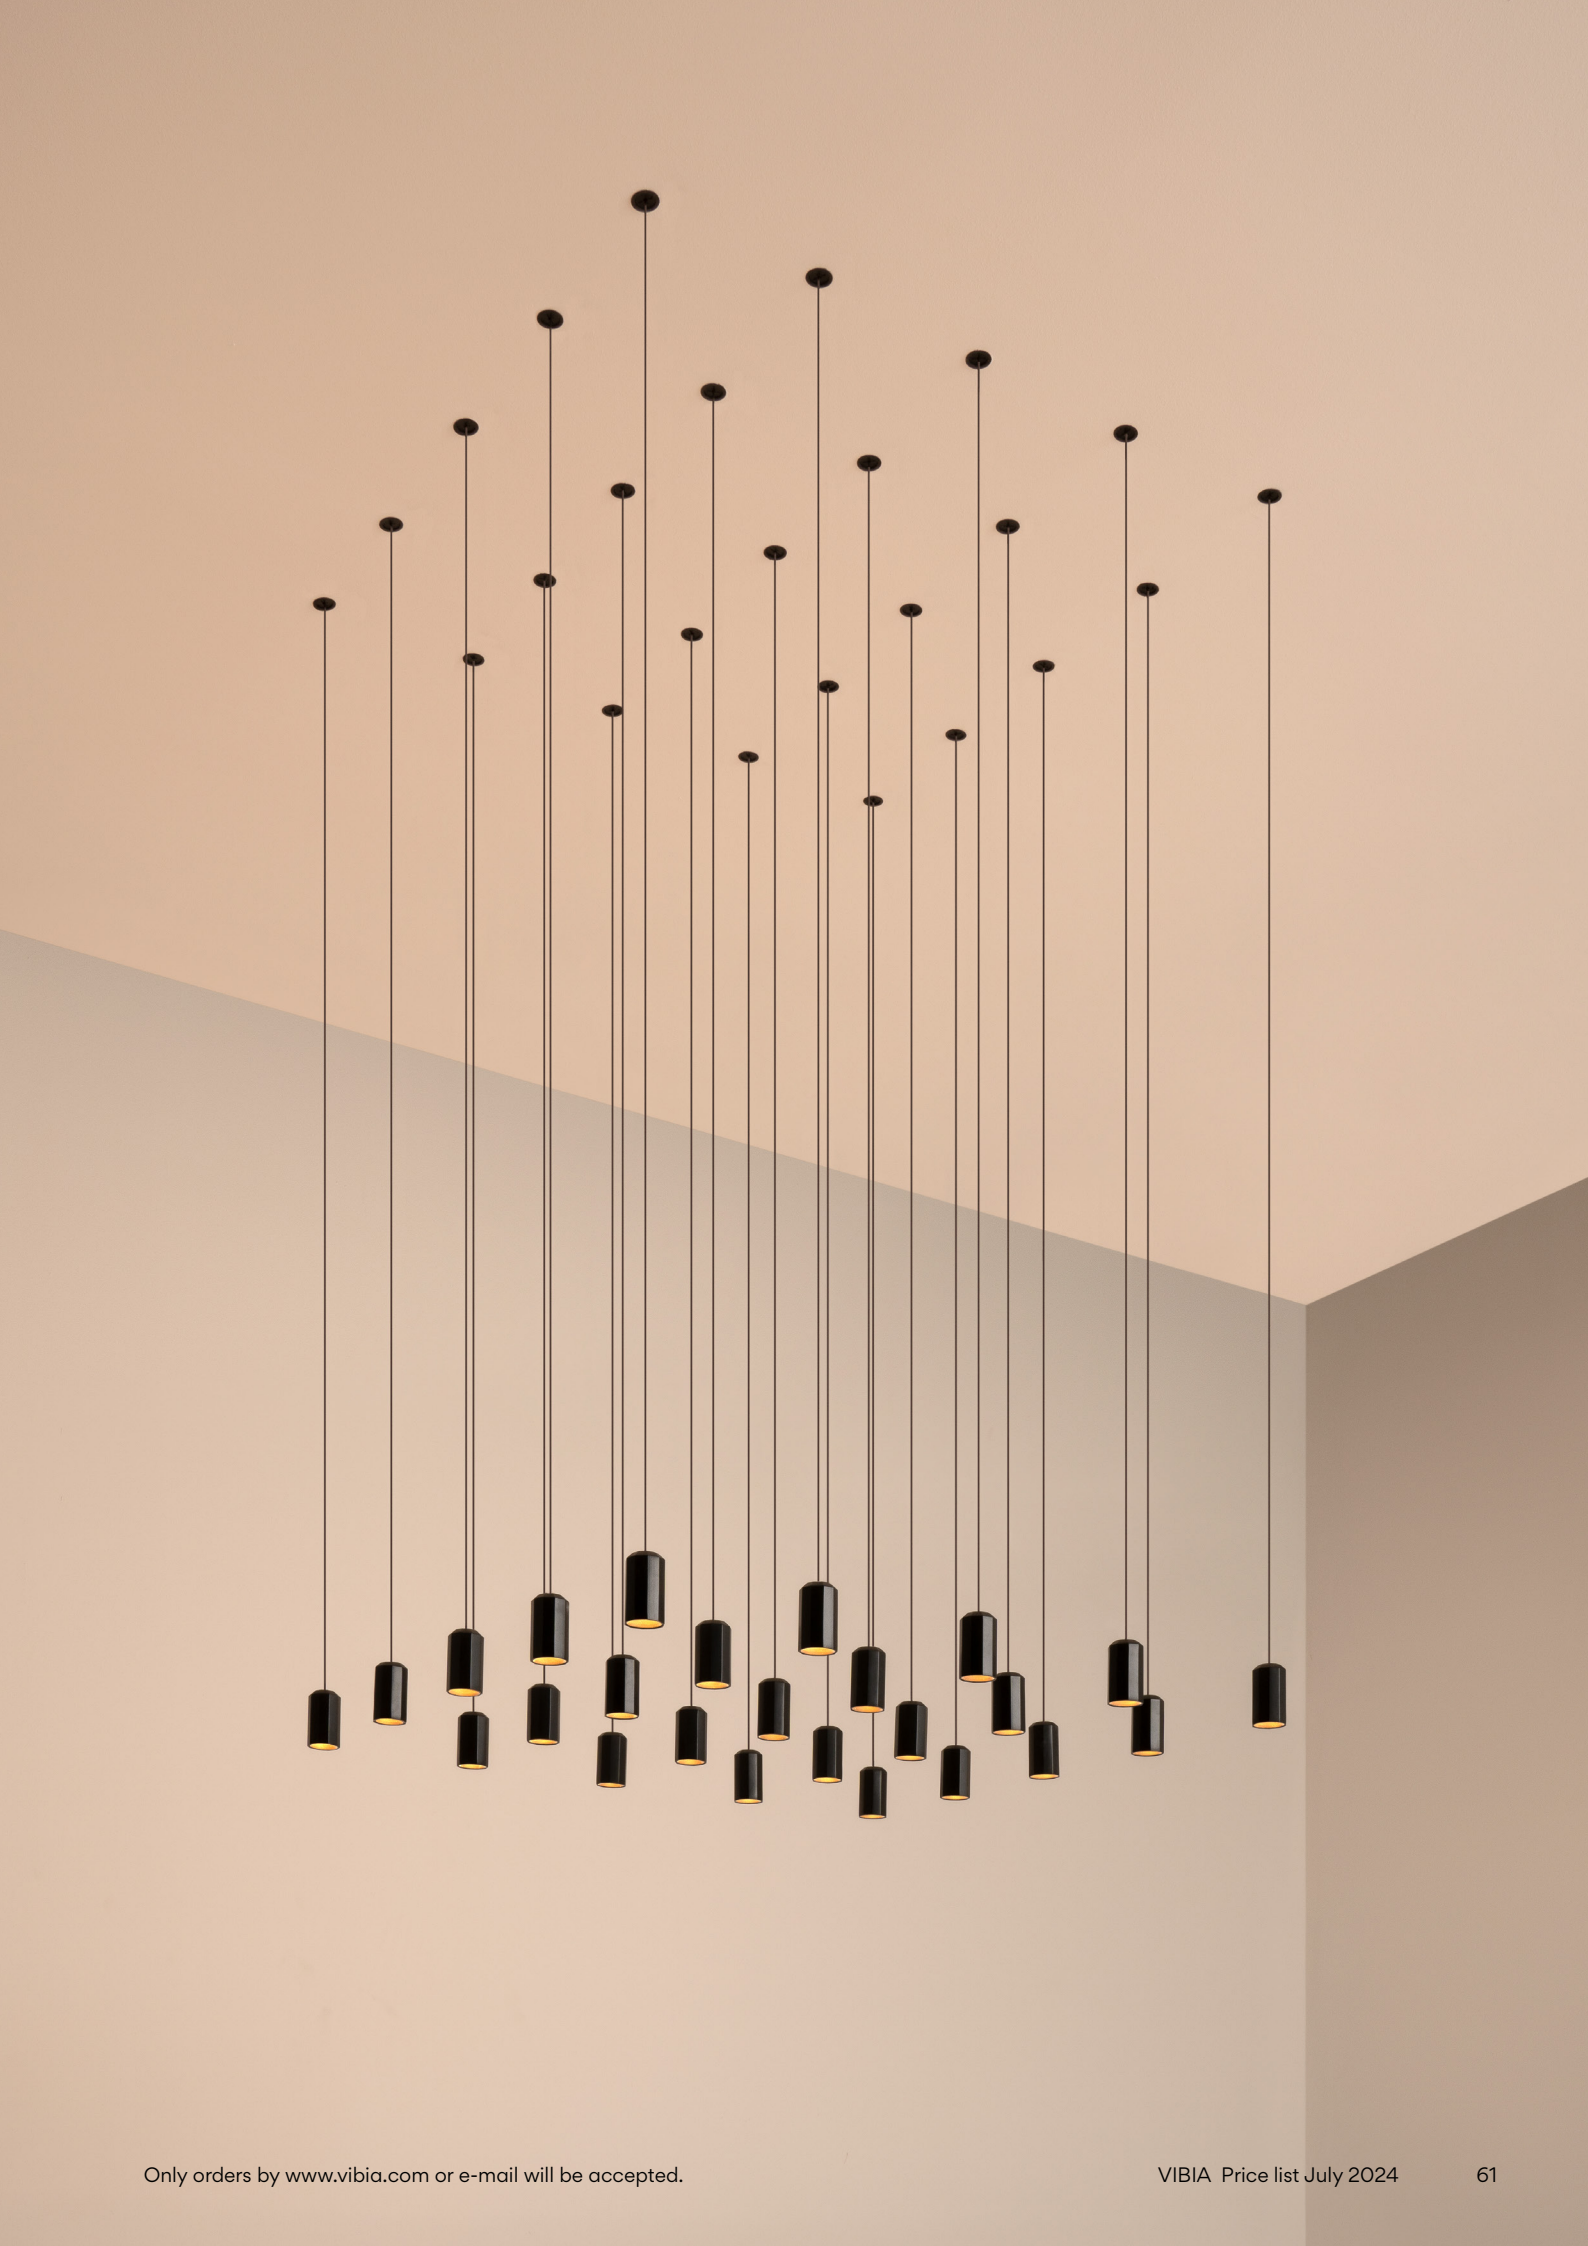

MULTIPLE MODELS


Select your model at [vibia.com](http://vibia.com) and adjust



2 x 0361



3 x 0345



3 x 0345




4 x 0361




4 x 0345



5 x 0345



5 x 0361



7 x 0345



6 x 0361



8 x 0345




15 x 0361



8 x 0345




9 x 0361 From: 3.420,00 €



12 x 0345 From: 5.460,00 €



11 x 0361 From: 4.180,00 €




41 x 0361 From: 15.580,00 €



25 x 0345



54 x 0345



45 x 0361

See more  
multiple models  
at [vibia.com](http://vibia.com)

Finishes

● **04/** \_ \_ Black  
(RAL 9005)

LED Colour Temperature

/1 \_ 2700 K  
/2 \_ 3000 K  
/3 \_ 3500 K  
CRI >90

Control

Model \_ \_ / \_ \_

\_ \_ / \_ 1 DALI-2  
\_ \_ / \_ B Push; 1-10V  
\_ \_ / \_ Z Casambi

⚡ Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 0345, 0361

**Drop ceiling**

**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.


**\_23**  
Built-in XS




Ø 8 cm  
height 6 cm

match with fixture finish.

**Remote**



**Built-in**



**Regular ceiling**


**\_10**  
Surface



Ø 20 cm


match with fixture finish.

**\_18**  
Free Wire




Ø 20 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.



Ø 36 cm



Ø 40 cm

Materials

Diffuser: Pressed-glass. / PC- Polycarbonate.  
Body: Aluminum. Canopy: Steel.  
Ceiling supports: POM.

Notes

Additional cable length  
from 2 m. 16,00 €/m

LED IP20 CE UK ENE Bi-volt