

# Pin

Design by Ichiro Iwasaki


A timeless proposal from Japanese designer Ichiro Iwasaki, the Pin is both classic and contemporary. Characterised by a graceful stem and subtle, functional expression, it is small in scale but with exceptional lighting efficiency.

## Table



1650


23 x 55 cm

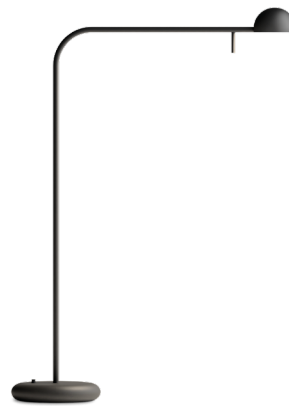

1655

40 x 55 cm

### 1650



#### Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 0502-Y50R)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

#### Materials

Head: Aluminum. Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate. Rod: Steel.

#### Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100~240V 50/60Hz

#### LED Colour Temperature

/1\_ 2700 K - 485 lm  
E →  
CRI >90

#### Control

1650 \_ \_ / 10 On/ Off

#### Packaging

1 Box 0,174 x 0,212 x 0,713 m  
Vol 0,0212 m<sup>3</sup>  
Gross weight 2,94 Kg Net weight 2 Kg

#### Notes


Switch on the base. Electric cable 3 m

LED IP20 CE ENEC EAC Bi-volt



1160	10	/1A
Model	Finish	Control
LED Colour Temperature		

1655



Finishes

- 11/ \_ \_ Black (NCS S 8500-N)
- 23/ \_ \_ Warm White (NCS S 0502-Y50R)
- 58/ \_ \_ Cream (NCS S 2005-Y20R)
- 62/ \_ \_ Green (NCS S 3010-G20Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

Materials

Head: Aluminum. Base: Zinc Alloy.  
Diffuser: PC- Polycarbonate. Rod: Steel.

Light Source and electronics

1 x LED 4,5 W 350 mA  
Constant Current 350 mA  
100-240V 50/60Hz

LED Colour Temperature

/1\_ 2700 K - 485 lm  
E →  
CRI >90

Control

1655 \_ \_ / 10 On/ Off

Packaging

1 Box 0,20 x 0,357 x 0,67 m  
Vol 0,0480 m<sup>3</sup>  
Gross weight 3,68 Kg Net weight 2,2 Kg

Notes

Switch on the base. Electric cable 3 m

LED IP20 CE ENEC EAC Bi-volt