

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendant

Height 70 cm



Ø 37 cm


1800



Ø 54,5 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 54,5 cm

1820



Ø 82,5 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 54,5 cm

1825



Ø 82,5 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 54,5 cm

1850

Height 110 cm



Ø 54,5 cm

1855



Ø 82,5 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 54,5 cm

1860



Ø 82,5 cm


1870



Ø 124 cm

1880

1800



- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 2662 lm
□
CRI >90

Control
1800 _ _ / _ _

- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection




_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7 Kg Net weight 4,8 Kg

Notes
Extra cable length.



1805



- Finishes (threads)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 2662 lm
□
CRI >90

Control
1805 _ _ / _ _

- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection




_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 22W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 7,3 Kg Net weight 5,1 Kg

Notes
Extra cable length.



1810



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 2662 lm
 ID >

Control

- 1810 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7,6 Kg Net weight 5,4 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1815



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 ID >

Control

- 1815 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 8,4 Kg Net weight 6,2 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1820

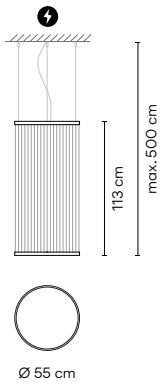

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control

1820 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg

Notes

Extra cable length.



1825

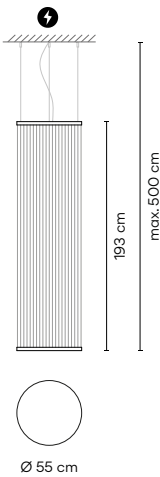

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control

1825 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg

Notes

Extra cable length.



1830

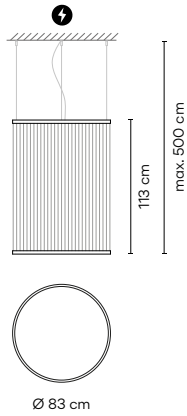

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID

Control

1830 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 13,5 Kg Net weight 9,5 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1835

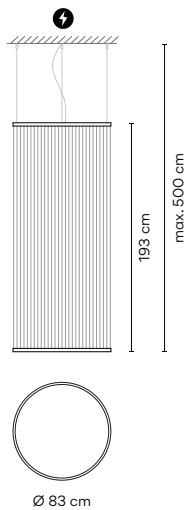

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID
 CRI >90

Control

1835 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 14,1 Kg Net weight 10,1 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1840

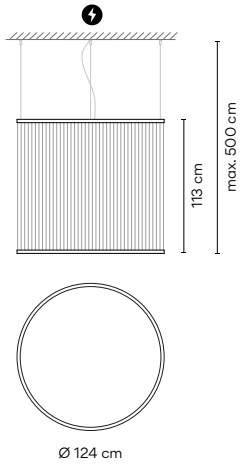

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90


Control

1840 __ / __

- __ / 13 1-10V
- __ / 1D Push; DALI-2
- __ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19 Kg Net weight 13 Kg

Notes

Extra cable length.



1845

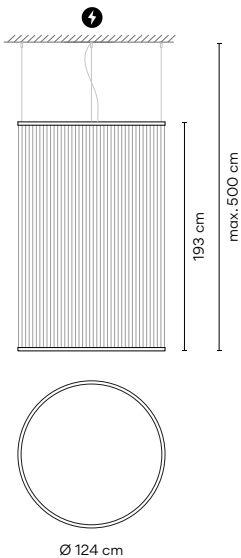

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D
CRI >90


Control

1845 __ / __

- __ / 13 1-10V
- __ / 1D Push; DALI-2
- __ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics


1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg

Notes

Extra cable length.



1850



- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 ID >

Control

1850 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 7,9 Kg Net weight 5,7 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1855

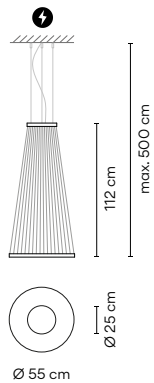

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1 _ 2700 K - 3993 lm
 ID >

Control

1855 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,3 Kg Net weight 6,1 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Multi-volt

1860

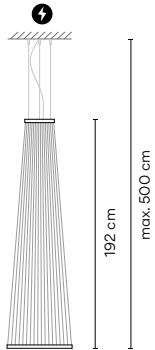

- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 3993 lm
D
CRI >90

Control

1860 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection



_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.



Light Source and electronics
1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,62 x 0,62 x 0,121 m
Vol 0,0461 m³
Gross weight 8,7 Kg Net weight 6,5 Kg

Notes
Extra cable length.



1865



- Finishes (threads)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
/1 _ 2700 K - 6050 lm
D
CRI >90

Control

1865 __ / __
__ / 13 1-10V
__ / 1D Push; DALI-2
__ / 1Z Casambi

- Finishes (rings and canopy)
- Black (NCS S 8500-N)

Select Electrical connection




_10 Surface
_24 Built-in S
_31 Remote Micro

Materials
Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.


Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg

Notes
Extra cable length.



1870

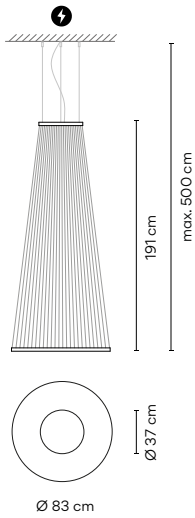

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1_ 2700 K - 6050 lm
 ID →
 CRI >90

Control

1870 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 12,4 Kg Net weight 9,4 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE Multi-volt

1875

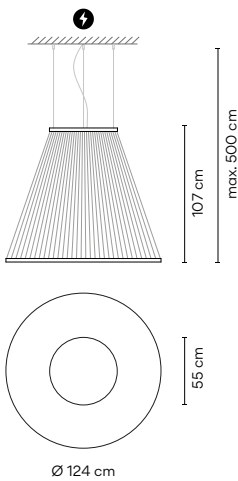

- Finishes (threads)**
- 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S4040-Y70R)
 - 47/ __ Green L1 (NCS S 4005-G80Y)


LED Colour Temperature
 /1_ 2700 K - 9196 lm
 ID →
 CRI >90

Control

1875 __ / __
 __ / 13 1-10V
 __ / 1D Push; DALI-2
 __ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

⚡ Select Electrical connection



_10 Surface
 _24 Built-in S
 _31 Remote Micro

Materials

Upper ring: Aluminum.
 Bottom ring: Brass.
 Diffuser: PC- Polycarbonate.
 Threads: PES FR.

Light Source and electronics

1 x LED STRIP 76W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz

Packaging


1 Box 1,35 x 1,35 x 0,12 m
 Vol 0,2187 m³
 Gross weight 15,9 Kg Net weight 11,9 Kg

Notes

Extra cable length.

LED IP20 CE UK ENE Multi-volt

1880

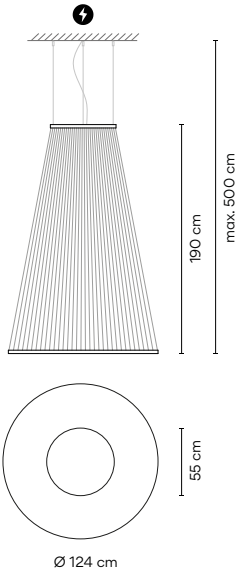

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
/1 _ 2700 K - 9196 lm
D


CRI >90

Control

- 1880 _ _ / _ _
- _ _ / 13 1-10V
- _ _ / 1D Push; DALI-2
- _ _ / 1Z Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Select Electrical connection



- _10 Surface
- _24 Built-in S
- _31 Remote Micro

Materials

Upper ring: Aluminum.
Bottom ring: Brass.
Diffuser: PC- Polycarbonate.
Threads: PES FR.

Light Source and electronics


1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 16,8 Kg Net weight 12,8 Kg

Notes

Extra cable length.



Select Electrical connection

Choose your preferred installation option according to your needs.

Drop ceiling

- _31 Remote Micro
- _24 Built-in S



Ø 3 cm height 7 cm
Ø 12 cm height 6 cm
black finish.
for plaster ceilings.
Black finish.


Regular ceiling

- _10 Surface



Ø 25,5 cm height 4,5 cm
Ø 37,5 cm height 4,5 cm
black finish.

Remote



Built-in

