

Halo Jewel

Design by Martín Azúa


Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.

Pendant

INDIVIDUAL MODELS

2350

Ø 56,3 cm

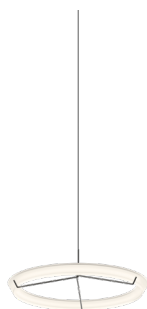

2351

Ø 56,3 cm



2355

Ø 16 x 350 cm



2356

Ø 27 x 350 cm




MULTIPLE MODELS



INDIVIDUAL MODEL

2350

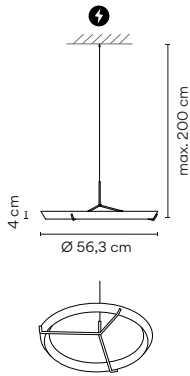

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm [G] >	2350 __ / __
	CRI >90	__ / _1 DALI-2
	/2_ 3000 K - 2024 lm [F] >	__ / _3 1-10V
	CRI >80	__ / _Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm [G] >	2350 __ / __
	CRI >90	__ / _1 DALI-2
		__ / _3 1-10V
		__ / _Z Casambi

Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PMMA. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Light Source and electronics


1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Notes

Extra cable length.



2351

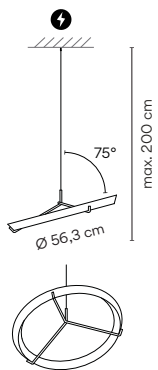

Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 1904 lm [G] >	2351 __ / __
	CRI >90	__ / _1 DALI-2
	/2_ 3000 K - 2024 lm [F] >	__ / _3 1-10V
	CRI >80	__ / _Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1_ 2700 K - 1904 lm [G] >	2351 __ / __
	CRI >90	__ / _1 DALI-2
		__ / _3 1-10V
		__ / _Z Casambi

Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: PMMA. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Light Source and electronics


1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz


Notes


Extra cable length.




2355

Finishes ● 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	Control 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

Finishes ● 20/ __ Gold (Gold)	LED Colour Temperature /1 _ 2700 K - 1415 lm /2 _ 3000 K - 1224 lm F  CRI >90	Control 2355 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---

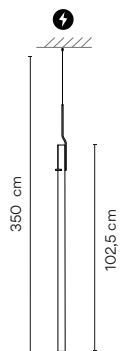

 Select Electrical connection

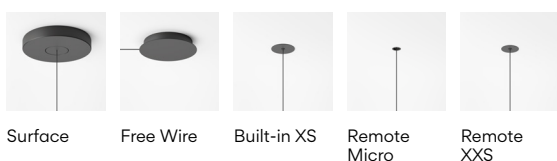



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS


Materials Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	Packaging 1 Box 0,13 x 0,19 x 1,265 m Vol 0,0312 m ³ Gross weight 5 Kg Net weight 4,1 Kg
Light Source and electronics 1 x LED STRIP 24V 15,3 W Constant Voltage 24V 220~240V 50/60Hz	Notes Extra cable length.




2356

Finishes ● 11/ __ Black (NCS S 8500-N)	LED Colour Temperature /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	Control 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
---	---	---

Finishes ● 20/ __ Gold (Gold)	LED Colour Temperature /1 _ 2700 K - 4246 lm /2 _ 3000 K - 3672 lm F  CRI >90	Control 2356 __ / __ __ / _ 1 DALI-2 __ / _ 3 1-10V __ / _ Z Casambi
--	---	---

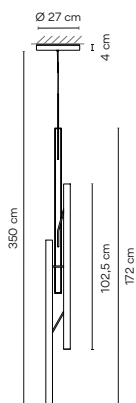

Materials Diffuser: PMMA. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	Packaging 1 Box 0,31 x 0,33 x 2 m Vol 0,2046 m ³ Gross weight 7,4 Kg Net weight 6,06 Kg
Light Source and electronics 3 x LED STRIP 24V 15,3 W Constant Voltage 24V 100~277V 50/60Hz	Notes Extra cable length.





MULTIPLE MODELS

Select your model at vibia.com and adjust



2 x 2355



2 x 2350



1 x 2351 2 x 2350



3 x 2351



3 x 2351



4 x 2350



5 x 2355



1 x 2351 3 x 2350



9 x 2355



17 x 2355



7 x 2355



25 x 2355

See more
multiple models
at vibia.com

Finishes

- **11/** __ Black
(NCS S 8500-N)
- **20/** __ Gold
(Gold)

LED Colour Temperature

- /1 _ 2700 K
- /2 _ 3000 K
- CRI >80
- CRI >90

Control




Model __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

⚡ Select Electrical connection



For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 2350, 2351

Drop ceiling




<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--

Regular ceiling




<p>_10 Surface</p>  <p>Ø 27 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 22 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	--	---

For Ref. 2355


Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Black finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>Black finish.</p>
---	---	--


Regular ceiling

<p>_10 Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p> <p>you can choose the finish of the canopy among black or white.</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	---	--	---

Remote



Built-in



Materials

Diffuser: PMMA. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Notes

Extra cable length.

