

Structural

Design by Arik Levy

Structural's cubic forms pair with slender metal rods that both join and separate the volumes, providing points of light connected in space. Its design deconstructs the light source and casts it in unexpected places, creating sculptural pieces integrated in the architecture.

Wall

2600

16 x 16 cm



2602

26 x 22 cm



2610

120 x 18 x 10 cm



2612

240 x 30 x 10 cm




2615

180 x 120 x 10 cm




2617

84 x 240 x 10 cm

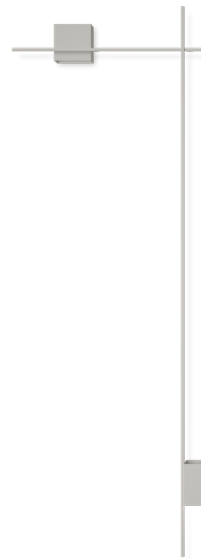

2600



Finishes

- **15/** _ _ Grey L2 (NCS S 2500-N)
- **21/** _ _ Black Grey (NCS S 7000-N)

Finish customization
(Available options:
Vibia colour palette.
Minimum quantity
10 units. Price + 10%)

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

LED Colour Temperature

- /1** _ 2700 K - 700 lm
 - /2** _ 3000 K - 756 lm
 - /3** _ 3500 K - 763 lm
- CRI >90

Control


- 2600** _ _ / _ _
-
- _ _ / _ **1** DALI-2
- _ _ / _ **3** 1-10V
-
- _ _ / _ **Z** Casambi

Packaging

1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 1,35 Kg Net weight 0,9 Kg



2602



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity
10 units. Price + 10%

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm

/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2602 __ / __

__ / _ 1 DALI-2

__ / _ 3 1-10V

__ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging


1 Box 0,4 x 0,4 x 0,2 m
Vol 0,032 m³
Gross weight 2,85 Kg Net weight 1,9 Kg

Notes

* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2610



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity
10 units. Price + 10%

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

1 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Control

2610 __ / __

__ / _ 1 DALI-2

__ / _ 3 1-10V

__ / _ Z Casambi

Packaging


2 Boxes
Total Vol 0,036 m³
Gross weight 3,6 Kg Net weight 2,4 Kg

Notes

* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2612



Finishes

- 15/ __ Grey L2 (NCS S 2500-N)
- 21/ __ Black Grey (NCS S 7000-N)

Finish customization
(Available options: Vibia colour palette.)

Minimum quantity
10 units. Price + 10%

LED Colour Temperature

/1 _ 2700 K - 1400 lm
F

/2 _ 3000 K - 1513 lm

/3 _ 3500 K - 1526 lm
E

CRI >90

Control

2612 __ / __

__ / _ 1 DALI-2

__ / _ 3 1-10V

__ / _ Z Casambi

Materials

Diffuser: PC- Polycarbonate.
Main body: Aluminum.
Structures: Aluminum.

Light Source and electronics

2 x LED PLATE 24V 6 W
Constant Voltage 24V
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,042 m³
Gross weight 3,9 Kg Net weight 2,6 Kg

Notes

* Electrical connection point.

LED IP20 CE UK ENEC Bi-volt

2615



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
 /1 _ 2700 K - 1400 lm
 F
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm
 E
 CRI >90

Control
2615 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi


Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Packaging
 2 Boxes
 Total Vol 0,038 m³
 Gross weight 4,35 Kg Net weight 2,9 Kg

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Notes
 * Electrical connection point.
 LED IP20 CE UK ENE Bi-volt

2617



Finishes
 ● 15/ __ Grey L2 (NCS S 2500-N)
 ● 21/ __ Black Grey (NCS S 7000-N)
Finish customization
 (Available options: Vibia colour palette.
 Minimum quantity 10 units. Price + 10%)

LED Colour Temperature
 /1 _ 2700 K - 1400 lm
 F
 /2 _ 3000 K - 1513 lm
 /3 _ 3500 K - 1526 lm
 E
 CRI >90

Control
2617 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Materials
 Diffuser: PC- Polycarbonate.
 Main body: Aluminum.
 Structures: Aluminum.

Packaging
 2 Boxes
 Total Vol 0,041 m³
 Gross weight 4,35 Kg Net weight 2,9 Kg

Light Source and electronics
 2 x LED PLATE 24V 6 W
 Constant Voltage 24V
 110-240V 50/60Hz

Notes
 * Electrical connection point.
 LED IP20 CE UK ENE Bi-volt