


Break Plus

Design by Xuclà

Designed to blend instinctively with the architecture in which it exists, Break Plus converts any wall into a three dimensional mural. Arranged individually or as a group, it consists of four geometric volumes that cast beams of diffuse light upwards, downwards -or in both directions- creating a dynamic dialogue between light and shadow.

Outdoor

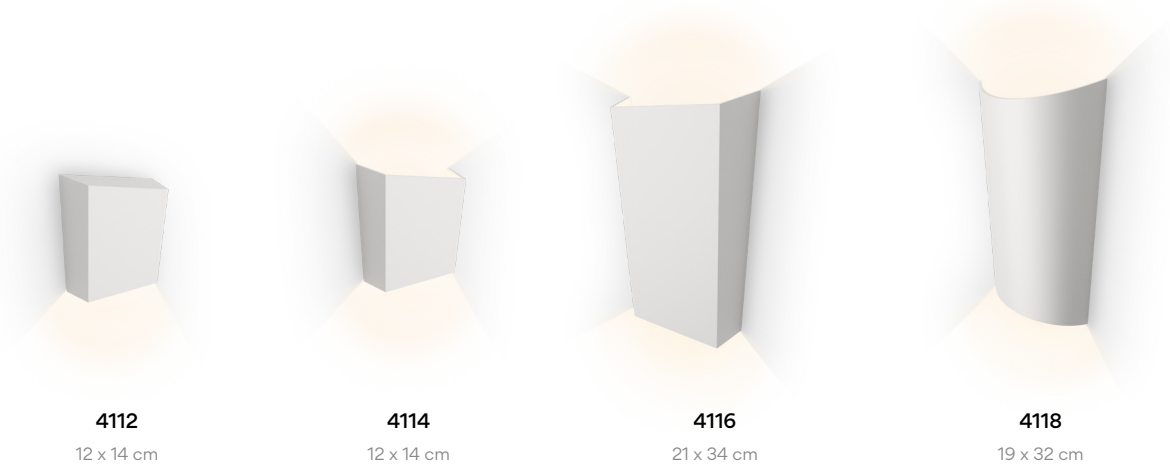


4112
12 x 14 cm

4114
12 x 14 cm

4116
21 x 34 cm

4118
19 x 32 cm

4112



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

- /1** _ 2700 K - 113 lm
- F** >
- /3** _ 3500 K - 146 lm
- D** >
- CRI >90

Control

4112 _ _ / _ _

_ _ / _ **0** On/ Off

_ _ / _ **1 30** DALI-2 (Remote)

_ _ / _ **Z 30** Casambi (Remote)

Materials

Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics


1 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz

Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m³
Gross weight 1 Kg Net weight 0,610 Kg



4114



- Finishes**
- **22/** __ Graphite Black (NCS S 8000-N)
 - **25/** __ Beige D1 (NCS S 4005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **95/** __ Primer (NCS S 1000-N)

LED Colour Temperature

- /1** _ 2700 K - 227 lm
- F** >
- /3** _ 3500 K - 292 lm
- D** >
- CRI >90

Control

4114 _ _ / _ _

_ _ / _ **0** On/ Off

_ _ / _ **1 30** DALI-2 (Remote)

_ _ / _ **Z 30** Casambi (Remote)

Materials


Body: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 1W 350 mA
Constant Current 350 mA
100~240Vac. 50/60Hz


Packaging

1 Box 0,07 x 0,19 x 0,23 m
Vol 0,0030 m³
Gross weight 1 Kg Net weight 0,590 Kg





4116



- Finishes
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 95/ __ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
 G

/3 _ 3500 K - 925 lm
 F

CRI >90

Control

4116 _ _ / _ _

_ _ / _ 0 On/ Off

_ _ / _ 1 30 DALI-2 (Remote)

_ _ / _ Z 30 Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics


2 x LED 4W 350 mA
 Constant Current 350 mA
 100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
 Vol 0,0120 m³
 Gross weight 3,2 Kg Net weight 2,2 Kg

LED IP65 CE UK ENEC Bi-volt

4118



- Finishes
- 22/ __ Graphite Black (NCS S 8000-N)
 - 25/ __ Beige D1 (NCS S 4005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 95/ __ Primer (NCS S 1000-N)

LED Colour Temperature

/1 _ 2700 K - 707 lm
 G

/3 _ 3500 K - 925 lm
 F

CRI >90

Control

4118 _ _ / _ _

_ _ / _ 0 On/ Off

_ _ / _ 1 30 DALI-2 (Remote)

_ _ / _ Z 30 Casambi (Remote)

Materials

Body: Aluminum.
 Diffuser: PC- Polycarbonate.

Light Source and electronics

2 x LED 4W 350 mA
 Constant Current 350 mA
 100~240Vac. 50/60Hz

Packaging

1 Box 0,11 x 0,27 x 0,42 m
 Vol 0,0120 m³
 Gross weight 3,2 Kg Net weight 1,71 Kg

LED IP65 CE UK ENEC Bi-volt