


Empty


Design by Xuclà

Empty, lends itself to Vibia's 'furniture meets light' concept. Incorporating a table, stool and light fixture into a single three-dimensional entity, each geometric structure glows with subtle, indirect light from an invisible source.

Outdoor

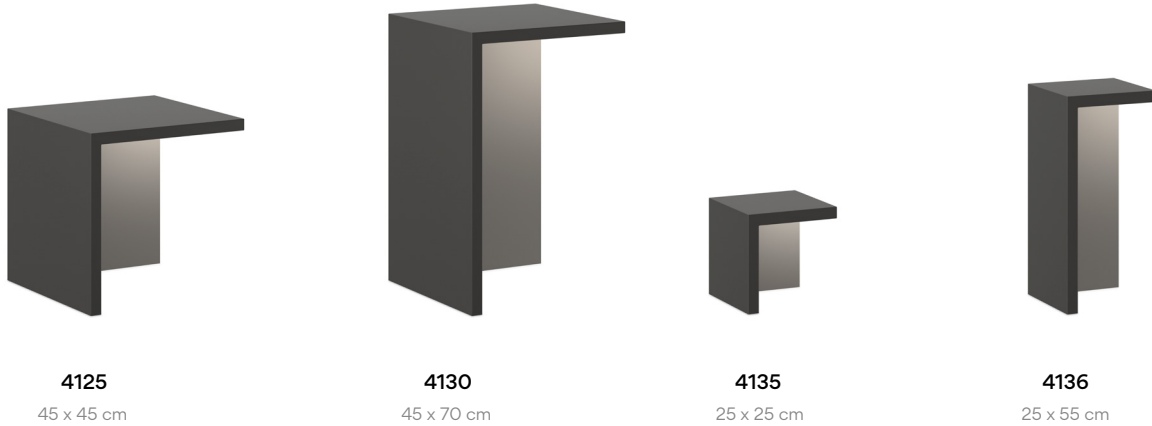

4125



- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1_ 2700 K - 664 lm
/3_ 3500 K - 1247 lm

LED

CRI >80 CRI >90

Control

4125 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging


1 Box 0,56 x 0,50 x 0,50 m
Vol 0,176 m³
Gross weight 40 Kg Net weight 36 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED **IP66** **CE** **UK** **ERC** **Bi-volt**

4130



- Finishes**
- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
 - 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

/1_ 2700 K - 664 lm
/3_ 3500 K - 1247 lm

LED

CRI >80 CRI >90

Control

4130 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 8,6 W
Constant Voltage 24V
100~277V 50/60Hz

Packaging

1 Box 0,56 x 0,56 x 0,81 m
Vol 0,254 m³
Gross weight 54,7 Kg Net weight 49,7 Kg


Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED **IP66** **CE** **UK** **ERC** **Bi-volt**



4135



Finishes

- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

- /1_ 2700 K - 304 lm
 - /3_ 3500 K - 1247 lm
- LED icon:
- CRI >80 CRI >90

Control

4135 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging


1 Box 0,36 x 0,36 x 0,36 m
Vol 0,04 m³
Gross weight 12,2 Kg Net weight 10,4 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC ENEC Bi-volt

4136



Finishes

- 18/ __ Polymer Concrete Grey (NCS S 2002-B50G)
- 22/ __ Graphite Black (NCS S 8000-N)

LED Colour Temperature

- /1_ 2700 K - 304 lm
 - /3_ 3500 K - 1247 lm
- LED icon:
- CRI >80 CRI >90

Control

4136 __ / _ 0 On/ Off

Materials

Body: Polymer concrete.
Diffuser: PMMA.

Light Source and electronics

2 x LED STRIP 24V 4,3 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,36 x 0,36 x 0,65 m
Vol 0,084 m³
Gross weight 22 Kg Net weight 19 Kg

Notes

Resistance to weight: 150 kg evenly distributed over the cantilevered surface of the lamp. This force should not be applied by impact.

LED IP66 CE ENEC ENEC

Dimmer Bi-volt