


Up


Design by Ramos & Bassols

Inspired by the neoclassical cornice, Up's geometric form protrudes from the ceiling with a quiet elegance. Its broad flat diffuser and refined rim create the illusion of daylight passing through an opening in the ceiling.

Ceiling

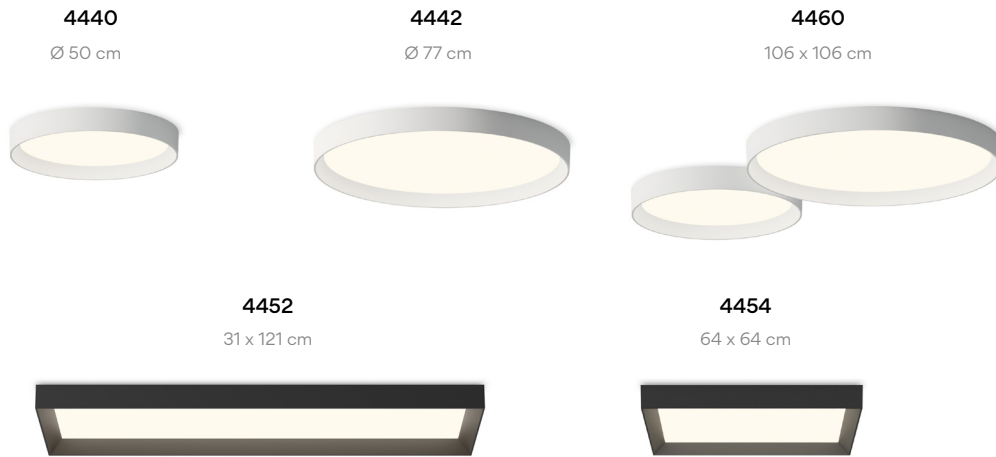

4440



- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 2207 lm
F

Tunable White
/8_ (2200 K - 4000 K)
1901 lm - 2461 lm
G - F
CRI >90

Control

4440 _ _ / _ _

_ _ / **A** Static White + Push; 1-10V; DALI-2

_ _ / **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8

_ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 26,5 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,55 x 0,55 m
Vol 0,0514 m³
Gross weight 11 Kg Net weight 7,5 Kg



4442



- Finishes**
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3959 lm
F

Tunable White
/8_ (2200 K - 4000 K)
3138 lm - 4238 lm
G - F
CRI >90

Control

4442 _ _ / _ _

_ _ / **A** Static White + Push; 1-10V; DALI-2

_ _ / **Z** Static White + Casambi

_ _ / **81** Tunable White + DALI-2 DT8

_ _ / **8Z** Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate. Body: Aluminum. Ceiling support: Steel.

Light Source and electronics


1 x LED PLATE 55,3 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,90 x 0,90 m
Vol 0,1377 m³
Gross weight 13 Kg Net weight 15 Kg



4452



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
F

Tunable White
/8_ (2200 K - 4000 K)
4355 lm - 5744 lm
G - F
CRI >90

Control
4452 _ _ / _ _

- _ _ / _ A Static White + Push; 1-10V; DALI-2
- _ _ / _ Z Static White + Casambi
- _ _ / 81 Tunable White + DALI-2 DT8
- _ _ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.


Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,42 x 1,31 m
Vol 0,0924 m³
Gross weight 14 Kg Net weight 12 Kg



4454



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
F

Tunable White
/8_ (2200 K - 4000 K)
5050 lm - 5039 lm
G - F
CRI >90

Control
4454 _ _ / _ _

- _ _ / _ A Static White + Push; 1-10V; DALI-2
- _ _ / _ Z Static White + Casambi
- _ _ / 81 Tunable White + DALI-2 DT8
- _ _ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.


Light Source and electronics
1 x LED PLATE 50 W 900 mA
Constant Current 900 mA
110-240V 50/60Hz

Packaging

1 Box 0,17 x 0,73 x 0,73 m
Vol 0,0905 m³
Gross weight 14 Kg Net weight 13 Kg



4460



- Finishes
- 18/ _ _ Graphite (RAL 7016)
 - 93/ _ _ White (RAL 9016)

LED Colour Temperature

Static White
/1_ 2700 K - 3957 lm
G

Tunable White
/8_ (2200 K - 4000 K)
5039 lm - 6699 lm
G - F
CRI >90

Control
4460 _ _ / _ _

- _ _ / _ A Static White + Push; 1-10V; DALI-2
- _ _ / _ Z Static White + Casambi
- _ _ / 81 Tunable White + DALI-2 DT8
- _ _ / 8Z Tunable White + Casambi

Materials

Diffuser: PC- Polycarbonate.
Body: Aluminum.
Ceiling support: Steel.

Light Source and electronics
1 x LED PLATE 26,5 W 700 mA
1 x LED PLATE 55,3W 750 mA
Constant Current 700 / 750 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,1891 m³
Gross weight 24 Kg Net weight 23 Kg

Notes

Only one electric connection point

