


Palo Alto

Design by Xuclà

Palo Alto is defined by a linear, angular silhouette. Industrial in style yet natural in form, it recalls a tree whose steel "branches" are embedded with LEDs, illuminating the surrounding landscape with a diffuse downlight.

Outdoor

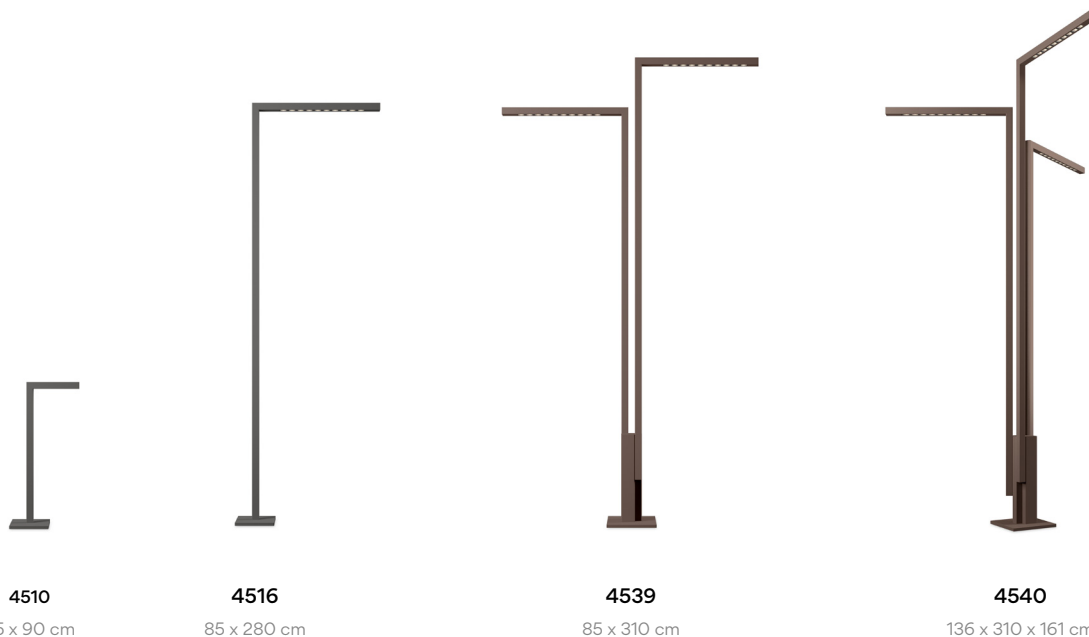

4510



- Finishes**
- 22/ __ Graphite Black (NCS S 8000-N)
 - 29/ __ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 179 lm

/3 _ 3500 K - 179 lm

☞

CRI >90

Control

4510 __ / __ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

2 x LED 2,2 W 700 mA
Constant Current 700 mA
220~240V 50/60Hz

Packaging

1 Box 0,44 x 0,40 x 1,10 m
Vol 0,2080 m³
Gross weight 11,1 Kg Net weight 10 Kg

LED IP65 CE UK ENEC Bi-volt

4516



- Finishes**
- 22/ __ Graphite Black (NCS S 8000-N)
 - 29/ __ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 1044 lm

/3 _ 3500 K - 1045 lm

☞

CRI >90

Control

4516 __ / __ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


1 x LED MODULE 24V 15 W
Constant Voltage 24V
100~240V 50/60Hz

Packaging

1 Box 0,32 x 0,32 x 2,64 m
Vol 0,2703 m³
Gross weight 18,4 Kg Net weight 16,5 Kg

LED IP65 CE UK ENEC Bi-volt

4539



- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 2089 lm
/3 _ 3500 K - 2089 lm

G

CRI >90

Control

4539 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics


2 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 2,61 m
Vol 0,3570 m³
Gross weight 46,4 Kg Net weight 41,76 Kg

LED IP65 CE Multi-volt

4540

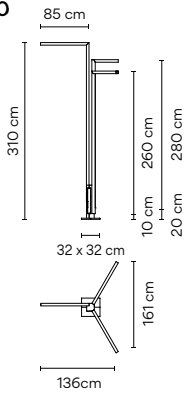

- Finishes**
- 22/ _ _ Graphite Black (NCS S 8000-N)
 - 29/ _ _ Brown D1 (NCS S 8005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 3134 lm
/3 _ 3500 K - 3134 lm

G

CRI >90

Control

4540 _ _ / _ 0 On/ Off

Materials

Body: Steel.
Cover: Steel.

Light Source and electronics

3 x LED MODULE 24V 15 W
Constant Voltage 24V
100-240V 50/60Hz

Packaging

1 Box 0,40 x 0,44 x 2,64 m
Vol 0,4646 m³
Gross weight 55,4 Kg Net weight 49,86 Kg

LED IP65 CE Multi-volt

