

Bamboo

Design by Antoni Arola & Enric Rodríguez

Bamboo's lean, natural form perfectly lends itself to an outdoor setting. Studded with LEDs, it seamlessly integrates with the landscape while adding a wash of light to walkways and common spaces.

Outdoor



4820

19 x 6 cm



4800 4802

6 x 60 cm

4801 4803

6 x 90 cm

4804

6 x 190 cm

4805

6 x 270 cm

4810

Ø 43 x 190 cm


4811

Ø 35 x 270 cm

4812

Ø 40 x 270 cm

4800



Finishes

- **07/** __ Khaki (RAL 7006)
- **54/** __ Oxide (RAL 8017)
- **58/** __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 181,2 lm
 - /3_ 3500 K - 181,2 lm
- ☐ **G** ☐
- CRI >90

Control

4800 __ / __ **0** On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging


1 Box 0,125 x 0,125 x 1,3 m
Vol 0,0203 m³
Gross weight 4 Kg Net weight 3,6 Kg

Notes

Surface



4801



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4801 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 6 Kg

Notes
Surface

LED IP66

4802



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 181,2 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 181,2 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4802 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0480 m³
Gross weight 7 Kg Net weight 5,5 Kg

Notes
Built-in

LED IP66

4803



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 _ 2700 K - 362,4 lm
● 54/ __ Oxide (RAL 8017)	/3 _ 3500 K - 362,4 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	CRI >90

Control
4803 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
2 x LED 2,1 W 700 mA
Constant Current 700 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0470 m³
Gross weight 8,5 Kg Net weight 5,8 Kg

Notes
Built-in

LED IP66

4804



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 543,7 lm
- /3_ 3500 K - 543,7 lm

Control

4804 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

3 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0480 m³
Gross weight 8 Kg Net weight 6,5 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4805



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 724,9 lm
- /3_ 3500 K - 724,9 lm

Control

4805 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

4 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,0600 m³
Gross weight 9 Kg Net weight 7 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4810



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 906,1 lm
- /3_ 3500 K - 906,1 lm

Control

4810 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

5 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging


3 Boxes
Total Vol 0,1388 m³
Gross weight 15 Kg Net weight 12,5 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4811



Finishes

- 07/ __ Khaki (RAL 7006)
- 54/ __ Oxide (RAL 8017)
- 58/ __ Off-white (PANTONE WARM GRAY 2U)

LED Colour Temperature

- /1_ 2700 K - 1268,5 lm
- /3_ 3500 K - 1268,5 lm

Control

4811 __ / __ 0 On/ Off

Materials

Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics

7 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging


3 Boxes
Total Vol 1,660 m³
Gross weight 16,5 Kg Net weight 13 Kg

Notes

Built-in

LED ⊕ IP66 CE UK ENEC EAC Bi-volt

4812

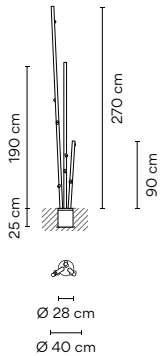

Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 2700 K - 1631,0 lm
● 54/ __ Oxide (RAL 8017)	/3 3500 K - 1631,0 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	LED
	CRI >90

Control
4812 __ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.


Light Source and electronics
9 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging
4 Boxes
Total Vol 0,1854 m³
Gross weight 21,6 Kg Net weight 19,44 Kg

Notes
Built-in

LED IP66 CE UK ENEC Bi-volt

4815



Finishes
● 18 Polymer concrete (NCS S 2002-B50G)


4815 18

Materials
Base: Polymer concrete.

Packaging
1 Box 0,40 x 0,50 x 0,50 m
Vol 0,1000 m³
Gross weight 39 Kg Net weight 35 Kg

Notes
Surface installation accessory.
For ref. 4810. 4811. 4812

4820



Finishes	LED Colour Temperature
● 07/ __ Khaki (RAL 7006)	/1 2700 K - 181,2 lm
● 54/ __ Oxide (RAL 8017)	/3 3500 K - 181,2 lm
● 58/ __ Off-white (PANTONE WARM GRAY 2U)	LED
	CRI >90

Control
4820 __ / __
__ / __ 0 On/ Off

Materials
Cane: PES + FG- Fiberglass.
Diffuser: PMMA.

Light Source and electronics
1 x LED 2,1 W 700 mA
Constant Current 700 mA
100-240V 50/60Hz

Packaging
1 Box 0,25 x 0,10 x 0,10 m
Vol 0,0025 m³
Gross weight 2 Kg Net weight 1 Kg

Notes
Surface

LED IP66 CE UK ENEC Bi-volt