

Puck

Design by Jordi Vilardell

Inspired by the classic circle silhouette, Puck panel light's simple, spherical forms can be superimposed on one another, lending sensibility overhead. Crafted of premium, opal triplex blown glass, it casts a warm glow.


Ceiling Wall



5410
24,4 x 6,6 cm




5412
27,2 x 7,7 cm



5425 5427
31,8 x 24,2 cm




5430 5432
46,7 x 38 cm

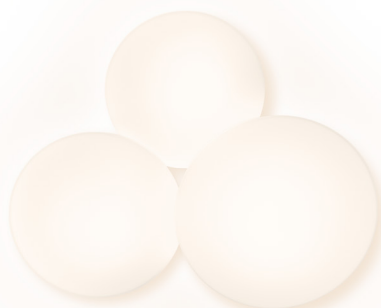

5435 5437
56,8 x 49,2cm

5410



Finishes
 03 White
 (RAL 9016)

LED Colour Temperature
 2700 K 470 lm

5410 03 / 00 On/ Off

Materials

Canopy: Aluminum.
 Diffuser: Blown-glass.


Light Source and electronics
 2 x LED G9 4,2 W

Packaging

1 Box 0,37 x 0,37 x 0,23 m
 Vol 0,0315 m³
 Gross weight 0,95 Kg Net weight 0,7 Kg



5412



Finishes
 03/ _ _ White
 (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 880 lm
 E
 CRI >90

Control
5412 03 / 10 On/ Off

Materials

Canopy: Aluminum.
 Diffuser: Blown-glass.


Light Source and electronics
 1 x LED PLATE 7,6 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging

1 Box 0,37 x 0,37 x 0,23 m
 Vol 0,0315 m³
 Gross weight 0,95 Kg Net weight 0,7 Kg



5425



Finishes
 03 White
 (RAL 9016)

LED Colour Temperature
 2700 K - 470 lm

5425 03 / 00 On/ Off

Materials

Canopy: Aluminum.
 Diffuser: Blown-glass.

Light Source and electronics
 2 x LED G9 4,2 W

Packaging


1 Box 0,25 x 0,42 x 0,42 m
 Vol 0,0441 m³
 Gross weight 2,26 Kg Net weight 1,08 Kg

Notes

All version require only one electrical connection



5427



Finishes
 03/ _ _ White
 (RAL 9016)

LED Colour Temperature
 /1_ 2700 K - 831 lm
 D
 /3_ 3500 K - 878 lm
 G
 CRI >90

Control
5427 03 / _ 0 On/ Off

Materials

Canopy: Aluminum.
 Diffuser: Blown-glass.

Light Source and electronics
 2 x LED PLATE 3,2 W 350 mA
 Constant Current 350 mA
 100~240V 50/60Hz

Packaging


1 Box 0,25 x 0,42 x 0,42 m
 Vol 0,0441 m³
 Gross weight 2,26 Kg Net weight 1,08 Kg

Notes

All version require only one electrical connection



5430	Finishes	LED Colour Temperature	Control
	● 03 White (RAL 9016)	2700 K 470 lm	5430 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED G9 4,2 W

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection



5432	Finishes	LED Colour Temperature	Control
	● 03/ __ White (RAL 9016)	/1_ 2700 K - 1760 lm E → CRI >90	5432 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
2 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
1 Box 0,27 x 0,60 x 0,60 m
Vol 0,0972 m³
Gross weight 4,2 Kg Net weight 2,15 Kg

Notes
All version require only one electrical connection



5435	Finishes	LED Colour Temperature	Control
	● 03 White (RAL 9016)	2700 K 470 lm	5435 03 / 00 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.


Light Source and electronics
3 x LED G9 4,2 W

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection



5437	Finishes	LED Colour Temperature	Control
	● 03/ __ White (RAL 9016)	/1_ 2700 K - 2640 lm E → CRI >90	5437 03 / 10 On/ Off



Materials
Canopy: Aluminum.
Diffuser: Blown-glass.

Light Source and electronics
3 x LED PLATE 7,6 W 350 mA
Constant Current 350 mA
100~240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,0780 m³
Gross weight 7,5 Kg Net weight 4,1 Kg

Notes
All version require only one electrical connection



