

# Mayfair

Design by Diego Fortunato

A modern reimagining of the traditional 19th-century bouillotte lamp, the Mayfair collection is a statement in contemporary design. Perfectly proportioned, its luminaire casts a pool of diffuse, downward light to create an intimate lighting effect.

## Table Floor



**5500**

Ø 30 x 52 cm



**5505**

Ø 30 x 52 cm



**5510**

Ø 30 x 147 cm



**5515**


Ø 30 x 147 cm

### 5500

- Finishes**
- **07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
  - **08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

**LED Colour Temperature**  
**/1** \_ 2700 K - 2027 lm  
 **D**  
 CRI >90

**Control**  
**5500** \_\_ / \_\_  
 \_\_ / **16** Optical sensor  
 \_\_ / **18** Push 2 (without memory)



**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade: PMMA.  
 Tube: Steel. Base: Zinc Alloy.


**Light Source and electronics**  
 1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 100~240V 50/60Hz

**Packaging**  
 1 Box 0,22 x 0,35 x 0,61 m  
 Vol 0,0470 m<sup>3</sup>  
 Gross weight 3,6 Kg Net weight 3,4 Kg

**Notes**  
 Touch dimmer on base. Electric cable 2 m.

LED  IP20 CE UK ENE  Dimmer  Bi-volt

5505



- Finishes**
- 18/ \_\_ Graphite (RAL 7016)
  - 23/ \_\_ Warm White (NCS S 0502-Y50R)
  - 25/ \_\_ Beige D1 (NCS S 4005-Y50R)
  - 38/ \_\_ Terra Dark (NCS S 5040-Y70R)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options:  
 Vibia colour palette.  
 Minimum quantity  
 10 units. Price + 10%)

**LED Colour Temperature**  
 /1\_ 2700 K - 2027 lm  
  
 CRI >90

**Control**  
 5505 \_\_ / \_\_  
 \_\_ / 16 Optical sensor  
 \_\_ / 18 Push 2 (without memory)

- Finishes**
- 20/ \_\_ Gold
  - 67/ \_\_ Copper

**LED Colour Temperature**  
 /1\_ 2700 K - 2027 lm  
  
 CRI >90

**Control**  
 5505 \_\_ / \_\_  
 \_\_ / 16 Optical sensor  
 \_\_ / 18 Push 2 (without memory)

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade and tube: Steel.  
 Base: Zinc Alloy.

**Light Source and electronics**  
 1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 100~240V 50/60Hz


**Packaging**  
 1 Box 0,22 x 0,35 x 0,61 m  
 Vol 0,0470 m<sup>3</sup>  
 Gross weight 3,6 Kg Net weight 3,4 Kg

**Notes**  
 Touch dimmer on base. Electric cable 2 m.




5510

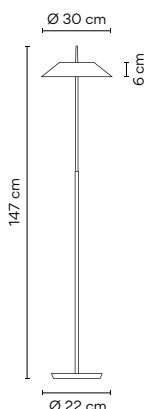

<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>07/</b> __ Graphite and green (RAL 7016, RAL 6026)</li> <li>● <b>08/</b> __ Graphite and orange (RAL 7016, RAL 2009)</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5510</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Shade: PMMA. Tube: Steel. Base: Zinc Alloy.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m<sup>3</sup> Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p><b>Notes</b></p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED □ IP20 CE UK ENE Dimmer Bi-volt</p>

5515

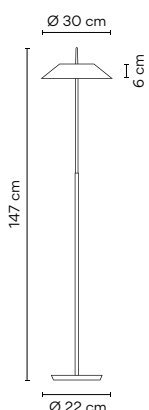


<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>18/</b> __ Graphite (RAL 7016)</li> <li>● <b>23/</b> __ Warm White (NCS S 0502-Y50R)</li> <li>● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)</li> <li>● <b>38/</b> __ Terra Dark (NCS S 5040-Y70R)</li> <li>● <b>47/</b> __ Green L1 (NCS S 4005-G80Y)</li> </ul> <p><b>Finish customization</b> (Available options: Vibia colour palette. Minimum quantity 10 units. Price + 10%)</p>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5515</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Finishes</b></p> <ul style="list-style-type: none"> <li>● <b>20/</b> __ Gold</li> <li>● <b>67/</b> __ Copper</li> </ul>	<p><b>LED Colour Temperature</b></p> <p><b>/1</b> _ 2700 K - 2027 lm</p> <p>□ ▢</p> <p>CRI &gt;90</p>	<p><b>Control</b></p> <p><b>5515</b> __ / __</p> <hr/> <p>__ / <b>16</b> Optical sensor</p> <p>__ / <b>18</b> Push 2 (without memory)</p>
<p><b>Materials</b></p> <p>Diffuser: PC- Polycarbonate. Shade and tube: Steel. Base: Zinc Alloy.</p> <p><b>Light Source and electronics</b></p> <p>1 x LED STRIP 24V 2,4 W 1 x LED STRIP 24V 12,6 W Constant Voltage 24V 100~240V 50/60Hz</p>	<p><b>Packaging</b></p> <p>1 Box 1,50 x 0,32 x 0,34 m Vol 0,1630 m<sup>3</sup> Gross weight 12,8 Kg Net weight 6,2 Kg</p> <p><b>Notes</b></p> <p>Touch dimmer on shade. Electric cable 2 m.</p>	<p>LED □ IP20 CE UK ENE Dimmer Bi-volt</p>



## Pendant

### INDIVIDUAL MODEL



**5520**    **5525**  
 Ø 30 cm    Ø 30 cm

### MULTIPLE MODELS



### INDIVIDUAL MODEL

#### 5520


- Finishes**
- 07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
  - 08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

**LED Colour Temperature**  
 /1\_ 2700 K - 2027 lm  
 D >


CRI >90

**Control**  
**5520** \_\_ / \_\_

\_\_ / **1** DALI-2  
 \_\_ / **B** Push; 1-10V  
 \_\_ / **Z** Casambi



#### Select Electrical connection

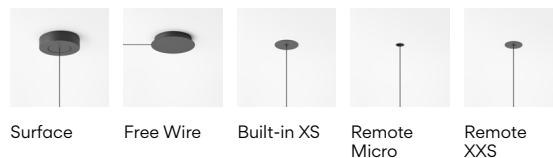


- \_10** Surface
- \_18** Free Wire
- \_23** Built-in XS
- \_31** Remote Micro
- \_32** Remote XXS

**Materials**  
 Diffuser: PC- Polycarbonate.  
 Shade: PMMA.  
 Tube and canopy: Steel.

**Light Source and electronics**  
 1 x LED STRIP 24V 2,4 W  
 1 x LED STRIP 24V 12,6 W  
 Constant Voltage 24V  
 220~240V 50/60Hz

**Packaging**  
 1 Box 0,50 x 0,31 x 0,31 m  
 Vol 0,0500 m<sup>3</sup>  
 Gross weight 2,8 Kg Net weight 1,8 Kg

**Notes**  
 Extra cable length.



5525

- Finishes**
- **18/** \_\_ Graphite (RAL 7016)
  - **23/** \_\_ Warm White (NCS S 0502-Y50R)
  - **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
  - **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
  - **47/** \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
(Available options: Vibia colour palette.  
Minimum quantity 10 units. Price + 10%)


**LED Colour Temperature**  
/1 \_\_ 2700 K - 2027 lm  
D >

**CRI >90**

**Control**  
**5525** \_\_ / \_\_

---

\_\_ / \_\_ **1** DALI-2  
\_\_ / \_\_ **B** Push; 1-10V  
\_\_ / \_\_ **Z** Casambi



- Finishes**
- **20/** \_\_ Gold
  - **67/** \_\_ Copper

**LED Colour Temperature**  
/1 \_\_ 2700 K - 2027 lm  
D >


**CRI >90**

**5525** \_\_ / \_\_

---

\_\_ / \_\_ **1** DALI-2  
\_\_ / \_\_ **B** Push; 1-10V  
\_\_ / \_\_ **Z** Casambi

**Select Electrical connection**

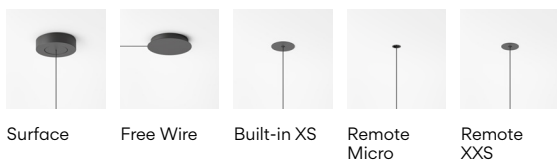

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
Diffuser: PC- Polycarbonate.  
Shade, tube and canopy: Steel.

**Light Source and electronics**  
1 x LED STRIP 24V 2,4 W  
1 x LED STRIP 24V 12,6 W  
Constant Voltage 24V  
220-240V 50/60Hz

**Packaging**  
1 Box 0,50 x 0,31 x 0,31 m  
Vol 0,0500 m<sup>3</sup>  
Gross weight 2,9 Kg Net weight 1,9 Kg

**Notes**  
Extra cable length.

LED IP20 CE UK ENEC



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust



2 x 5525



3 x 5525



4 x 5525



4 x 5525



5 x 5525



7 x 5525



8 x 5525



10 x 5525



22 x 5525





16 x 5525

See more  
multiple models  
at [vibia.com](http://vibia.com)








## Finishes

### 5520

-  **07/** \_\_ Graphite and green (RAL 7016, RAL 6026)
-  **08/** \_\_ Graphite and orange (RAL 7016, RAL 2009)

## Finishes

### 5525

-  **20/** \_\_ Gold
-  **67/** \_\_ Copper
-  **18/** \_\_ Graphite (RAL 7016)
-  **23/** \_\_ Warm White (NCS S 0502-Y50R)
-  **25/** \_\_ Beige D1 (NCS S 4005-Y50R)
-  **38/** \_\_ Terra Dark (NCS S 5040-Y70R)
-  **47/** \_\_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

## LED Colour Temperature

/1\_ 2700 K  
CRI >90

## Control

Model \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_B Push; 1-10V  
\_\_ / \_Z Casambi


## Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5520, 5525

### Drop ceiling


**\_31**  
Remote Micro



Ø 3 cm  
height 7 cm

for plaster ceilings.  
Black finish.

**\_32**  
Remote XXS



Ø 6 cm  
height 6 cm

for all types of drop ceilings.  
Match with fixture finish.


**\_23**  
Built-in XS




Ø 8 cm  
height 6 cm

match with fixture finish.

#### Remote



#### Built-in



### Regular ceiling

**\_10**  
Surface



Ø 16 cm

match with fixture finish.

**\_18**  
Free Wire




1 wire

Ø 20 cm



2 - 6 wires

Ø 36 cm



7 - 9 wires

Ø 40 cm

you can choose the finish of the canopy among black, white or any colour matching one of the pendant.

## Materials

### 5520

Diffuser: PC- Polycarbonate. Shade: PMMA.  
Tube and canopy: Steel.

### 5525

Diffuser: PC- Polycarbonate.  
Shade, tube and canopy: Steel.

## Notes

Additional cable length  
from 2 m. 16,00 €/m

