

---

Pendant

INDIVIDUAL MODEL




**5660**

Ø 16 x 200 cm




**5662**

Ø 40 x 200 cm



**5664**

Ø 60 x 200 cm




**5670**

Ø 16 x 200 cm



**5672**



Ø 40 x 200 cm



**5674**


Ø 60 x 200 cm

MULTIPLE MODELS



INDIVIDUAL MODEL

5660



- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500 N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_ \_ Blue M1 (NCS S 5010-B10G)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1269 lm
  - CRI >90
  - /2\_ 3000 K - 1123 lm
  - CRI >80
  - /3\_ 3500 K - 1374,9 lm
  - CRI >90

- Control**
- 5660 \_ \_ / \_ \_
- \_ \_ / \_ 1 DALI-2
  - \_ \_ / \_ B Push; 1-10V
  - \_ \_ / \_ Z Casambi

⚡ Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Shade: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.


**Light Source and electronics**  
 1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**  
 1 Box 0,24 x 0,217 x 0,217 m  
 Vol 0,01 m<sup>3</sup>  
 Gross weight 2,3 Kg Net weight 1,25 Kg

**Notes**  
 Extra cable length.

LED IP20 CE UK ENEC Bi-volt

5662




- Finishes**
- 10/ \_ \_ White (NCS S 0300-N)
  - 11/ \_ \_ Black (NCS S 8500 N)
  - 24/ \_ \_ Beige M1 (NCS S 2005-Y50R)
  - 42 / \_ \_ Blue M1 (NCS S 5010-B10G)
- Finish customization**  
 (Available options: Vibia colour palette.)  
 Minimum quantity 10 units. Price + 10%)

- LED Colour Temperature**
- /1\_ 2700 K - 1269 lm
  - CRI >90
  - /2\_ 3000 K - 1123 lm
  - CRI >80
  - /3\_ 3500 K - 1374,9 lm
  - CRI >90

- Control**
- 5662 \_ \_ / \_ \_
- \_ \_ / \_ 1 DALI-2
  - \_ \_ / \_ B Push; 1-10V
  - \_ \_ / \_ Z Casambi

⚡ Select Electrical connection

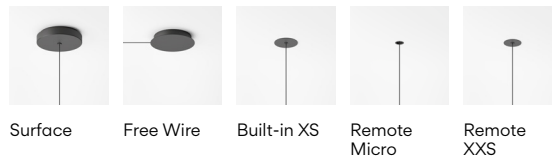

- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

**Materials**  
 Shade: Aluminum.  
 Diffuser: PMMA.  
 Canopy: Steel.

**Light Source and electronics**  
 1 x LED 9 W 350 mA  
 Constant Current 350 mA  
 220-240V 50/60Hz

**Packaging**  
 1 Box 0,36 x 0,537 x 0,537 m  
 Vol 0,10 m<sup>3</sup>  
 Gross weight 4,8 Kg Net weight 2,25 Kg

**Notes**  
 Extra cable length.

LED IP20 CE UK ENEC Bi-volt

5664

Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500 N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_\_ Blue M1 (NCS S 5010-B10G)


Finish customization  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
- D
- CRI >90
- /2 \_ 3000 K - 1123 lm
- D
- CRI >80
- /3 \_ 3500 K - 1374,9 lm
- G
- CRI >90

Control

- 5664 \_\_ / \_\_
- 
- \_\_ / \_ 1 DALI-2
- \_\_ / \_ B Push; 1-10V
- 
- \_\_ / \_ Z Casambi



Select Electrical connection



- \_10 Surface
- \_18 Free Wire
- \_23 Built-in XS
- \_31 Remote Micro
- \_32 Remote XXS

Materials

Shade: Aluminum.  
Diffuser: PMMA.  
Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

Packaging

1 Box 0,32 x 0,727 x 0,727  
Vol 0,17 m<sup>3</sup>  
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes

Extra cable length.



Height-adjustable shade.



MULTIPLE MODELS

Select your model at [vibia.com](http://vibia.com) and adjust




2 x 5660



2 x 5660



3 x 5660/5662/5664




4 x 5664



4 x 5660




5 x 5660



6 x 5660




8 x 5664



8 x 5660



8 x 5660



10 x 5664



20 x 5662



24 x 5660




7 x 5660




9 x 5660



29 x 5660



10 x 5660



13 x 5660



5 x 5662

See more  
multiple models  
at [vibia.com](http://vibia.com)

- Finishes**
- **10/ \_ \_ White**  
(NCS S 0300-N)
  - **11/ \_ \_ Black**  
(NCS S 8500 N)
  - **24/ \_ \_ Beige M1**  
(NCS S 2005-Y50R)
  - **42 / \_ \_ Blue M1**  
(NCS S 5010-B10G)

**Finish customization**  
(Available options:  
Vibia colour palette.  
Minimum quantity  
10 units. Price + 10%)

**LED Colour Temperature**

**/1 \_ 2700 K**  
D

**CRI >90**

**/2 \_ 3000 K**  
D

**CRI >80**

**/3 \_ 3500 K**  
G

**CRI >90**

**Control**

**Model \_ \_ / \_ \_**

---

\_ \_ / \_ **1** DALI-2

\_ \_ / \_ **B** Push; 1-10V

---




\_ \_ / \_ **Z** Casambi

**⚡ Select Electrical connection**






For each composition, the optimal minimum number of drivers will be delivered.


For Ref. 5660 / 5662 / 5664

**Drop ceiling**

<p><b>_31</b> Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p><b>_32</b> Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p><b>_23</b> Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
--	---	--

**Regular ceiling**

<p><b>_10</b> Surface</p>  <p>Ø 18 cm</p> <p>match with fixture finish.</p>	<p><b>_18</b> Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 wires</p> <p>Ø 22 cm</p>	 <p>3 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 8 wires</p> <p>Ø 40 cm</p> <p>you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.</p>
---	---	--	--	---

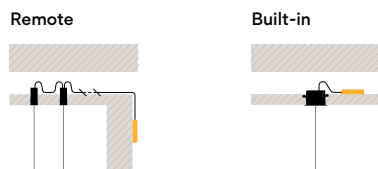


**Materials**  
Shade: Aluminum  
Diffuser: PMMA. Canopy: Steel.

**Notes**  
Additional cable length  
from 2 m. **16,00 €/m**



## 5670



## Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500 N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_\_ Blue M1 (NCS S 5010-B10G)

## LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
- /2 \_ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 \_ 3500 K - 1374 lm
- ☐
- CRI >90

## Control

- 5670 \_\_ / \_\_
- 
- \_\_ / \_\_ 1 DALI-2
- \_\_ / \_\_ B Push; 1-10V
- 
- \_\_ / \_\_ Z Casambi

## Materials

Rods: Carbon fiber.  
Shade: Aluminum.  
Diffuser: PMMA.  
Canopy: Steel.

## Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging


2 Boxes  
Total Vol 0,06 m<sup>3</sup>  
Gross weight 5,75 Kg Net weight 2 Kg

## Notes

Extra cable length.



## 5672



## Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500 N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_\_ Blue M1 (NCS S 5010-B10G)

## LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
- /2 \_ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 \_ 3500 K - 1374 lm
- ☐
- CRI >90

## Control

- 5672 \_\_ / \_\_
- 
- \_\_ / \_\_ 1 DALI-2
- \_\_ / \_\_ B Push; 1-10V
- 
- \_\_ / \_\_ Z Casambi

## Materials

Rods: Carbon fiber.  
Shade: Aluminum.  
Diffuser: PMMA.  
Canopy: Steel.

## Light Source and electronics

1 x LED 9W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging


2 Boxes  
Total Vol 0,14 m<sup>3</sup>  
Gross weight 8,25 Kg Net weight 3 Kg

## Notes

Extra cable length.



## 5674



## Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500 N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 42 / \_\_ Blue M1 (NCS S 5010-B10G)

## LED Colour Temperature

- /1 \_ 2700 K - 1269 lm
- /2 \_ 3000 K - 1123 lm
- ☐
- CRI >90 CRI >80
- /3 \_ 3500 K - 1374 lm
- ☐
- CRI >90

## Control

- 5674 \_\_ / \_\_
- 
- \_\_ / \_\_ 1 DALI-2
- \_\_ / \_\_ B Push; 1-10V
- 
- \_\_ / \_\_ Z Casambi

## Materials

Rods: Carbon fiber.  
Shade: Aluminum.  
Diffuser: PMMA.  
Canopy: Steel.

## Light Source and electronics

1 x LED 9 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz

## Packaging

2 Boxes  
Total Vol 0,21 m<sup>3</sup>  
Gross weight 9,7 Kg Net weight 3,7 Kg

## Notes

Extra cable length.



