

Pendant

INDIVIDUAL MODEL



5776
Ø 40 cm

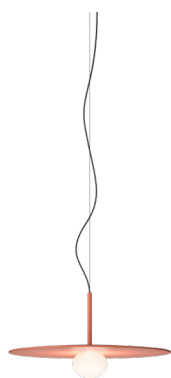


5770
Ø 25 cm



5778
Ø 24 cm



5772
Ø 13 cm


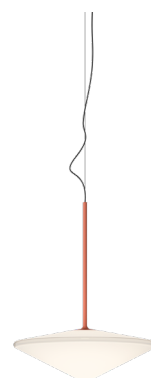


5780
Ø 34,5 cm




5774
Ø 20,5 cm

MULTIPLE MODELS

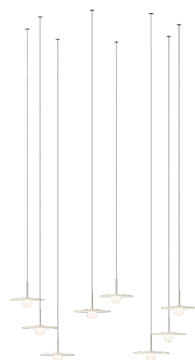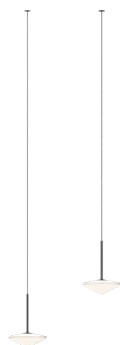

INDIVIDUAL MODEL

5770



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E
 CRI >90

Control

5770 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,26 x 0,13 m
 Vol 0,01 m³
 Gross weight 2,5 Kg Net weight 2 Kg

Notes

Extra cable length.



5772



Finishes

- 18/ _ _ Graphite (ADAPTA RF9913WX)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 58/ _ _ Cream (RAL 7044)
- 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature

/1_ 2700 K - 415 lm
 E
 CRI >90

Control

5772 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

⚡ Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
 Vol 0,015 m³
 Gross weight 1,8 Kg Net weight 1,2 Kg

Notes

Extra cable length.



5774



- Finishes**
- **18/** _ _ Graphite (ADAPTA RF9913WX)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **58/** _ _ Cream (RAL 7044)
 - **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control

5774 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface Free Wire Built-in XS Remote Micro Remote XXS

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,28 x 0,2 x 0,27 m
Vol 0,015 m³
Gross weight 2 Kg Net weight 1,4 Kg

Notes

Extra cable length.



5776



- Finishes**
- **18/** _ _ Graphite (ADAPTA RF9913WX)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **58/** _ _ Cream (RAL 7044)
 - **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K - 415 lm
E

CRI >90

Control

5776 _ _ / _ _

- _ _ / _ 1 DALI-2
- _ _ / _ B Push; 1-10V
- _ _ / _ Z Casambi

Select Electrical connection



Surface Built-in XS Remote Micro Remote XXS

- _10 Surface
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials

Diffuser: Blown-glass.
LED support: Aluminum.
Shade: Aluminum.
Canopy: Steel.

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Notes

Extra cable length.



5778

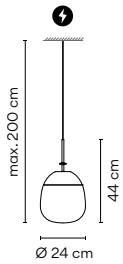


- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
 /1 _ 2700 K - 415 lm
 E

CRI >90

Control
 5778 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Select Electrical connection

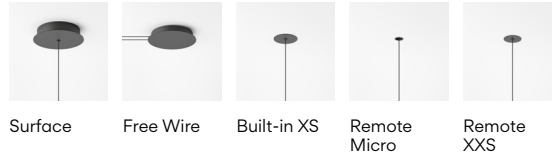

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
 Diffuser: Blown-glass.
 LED support: Aluminum.
 Canopy: Steel.


Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,33 x 0,33 x 0,42 m
 Vol 0,045 m³
 Gross weight 4 Kg Net weight 2,5 Kg

Notes
 Extra cable length.

LED IP20 CE UK ENEC Bi-volt

5780




- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
 /1 _ 2700 K - 415 lm
 E

CRI >90

Control
 5780 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ B Push; 1-10V
 _ _ / _ Z Casambi

Select Electrical connection

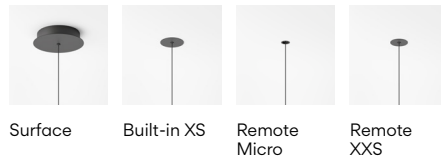

- _10 Surface
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
 Diffuser: Blown-glass.
 LED support: Aluminum.
 Shade: Aluminum.
 Canopy: Steel.

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,41 x 0,41 x 0,23 m
 Vol 0,038 m³
 Gross weight 4 Kg Net weight 2,5 Kg


Notes
 Extra cable length.

LED IP20 CE UK ENEC Bi-volt

Tempo

MULTIPLE MODELS

Select your model at vibia.com and adjust



2 x 5774



3 x 5772



4 x 5770



4 x 5772



5 x 5774



8 x 5770



15 x 5772




8 x 5770



10 x 5774



20 x 5772



16 x 5774




3 x 5770




5 x 5774



6 x 5774



29 x 5774



10 x 5772



16 x 5774



5 x 5774



8 x 5774

See more
multiple models
at vibia.com

- Finishes**
- **18/** _ _ Graphite (ADAPTA RF9913WX)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **58/** _ _ Cream (RAL 7044)
 - **62/** _ _ Green (NCS S 3010-G20Y)

LED Colour Temperature
/1_ 2700 K
CRI >90




Control
Model _ _ / _ _
_ _ / _ 1 DALI-2
_ _ / _ B Push; 1-10V
_ _ / _ Z Casambi

Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 5770, 5772, 5774

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---




Regular ceiling

<p>_10 Surface</p>  <p>Ø 16 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>1 wire</p> <p>Ø 20 cm</p>	 <p>2 - 6 wires</p> <p>Ø 36 cm</p>	 <p>7 - 9 wires</p> <p>Ø 40 cm</p>
--	--	--	---

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5778

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---




<p>_10 Surface</p>  <p>Ø 20 cm</p> <p>match with fixture finish.</p>	<p>_18 Free Wire</p>  <p>2 - 3 wires</p> <p>Ø 20 cm</p>	 <p>2 - 3 wires</p> <p>Ø 22 cm</p>	 <p>4 - 5 wires</p> <p>Ø 36 cm</p>
--	---	--	---

1-10V; DALI-2; Casambi


you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.

For Ref. 5776, 5780

Drop ceiling

<p>_31 Remote Micro</p>  <p>Ø 3 cm height 7 cm</p> <p>for plaster ceilings. Black finish.</p>	<p>_32 Remote XXS</p>  <p>Ø 6 cm height 6 cm</p> <p>for all types of drop ceilings. Match with fixture finish.</p>	<p>_23 Built-in XS</p>  <p>Ø 8 cm height 6 cm</p> <p>match with fixture finish.</p>
---	--	---


_10
Surface




Ø 20 cm

match with fixture finish.

Remote



Built-in



Materials

Diffuser: Blown-glass. LED support: Aluminum.
Shade: Aluminum. Canopy: Steel.

Notes

Additional cable length from 2 m. 16,00 €/m

