

# Spa

Design by Ramos & Bassols

Spa is the perfect lighting solution for any wellness space. From public dressing rooms, restaurants and spas, to private kitchens, corridors and bathrooms, its graceful simplicity allows for easy cleaning and seamless integration within the surrounding architecture of a variety of interiors.

## Ceiling Wall



**5975**

121 x 4,7 x 6,5 cm



**5977**

201 x 4,7 x 6,5 cm



**5979**

301 x 4,7 x 6,5 cm



**5981**

253 x 4,8 x 6,6 cm



**5983**


413 x 4,8 x 6,6 cm



**5985**

613 x 4,8 x 6,6 cm


5975



Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 1560 lm	<b>5975</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 1290 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 1,5 x 0,1 x 0,1 m Vol 0,015 m <sup>3</sup> Gross weight 3,1 Kg Net weight 1,6 Kg
Light Source and electronics 1 x LED STRIP 10,8 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	<b>LED</b> <b>IP44</b> <b>CE</b> <b>UK</b> <b>ERC</b> <b>Dimmer</b>


5977



Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 2560 lm	<b>5977</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 3360 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 2,3 x 0,1 x 0,1 m Vol 0,023 m <sup>3</sup> Gross weight 4,9 Kg Net weight 2,6
Light Source and electronics 1 x LED STRIP 21,6 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	<b>LED</b> <b>IP44</b> <b>CE</b> <b>UK</b> <b>ERC</b> <b>Dimmer</b>


5979



Finishes	LED Colour Temperature	Control
● <b>11/</b> __ Black (NCS S 8500-N)	<b>/1</b> _ 2700 K - 3840 lm	<b>5979</b> __ / __
● <b>23/</b> __ Warm White (NCS S 0502-Y50R)	<b>/3</b> _ 3500 K - 5040 lm	__ / <b>1</b> DALI-2
● <b>25/</b> __ Beige D1 (NCS S 4005-Y50R)	<b>E</b> >90	__ / <b>3</b> 1-10V
		__ / <b>Z</b> <b>30</b> Casambi (Remote)

Materials	Packaging
Profile and canopy: Aluminum. Difuser: PMMA.	1 Box 3,3 x 0,1 x 0,1 m Vol 0,033 m <sup>3</sup> Gross weight 6,9 Kg Net weight 3,6 Kg
Light Source and electronics 1 x LED STRIP 32,4 W 600 mA Constant Current 600 mA 220~240V 50/60Hz	<b>LED</b> <b>IP44</b> <b>CE</b> <b>UK</b> <b>ERC</b> <b>Dimmer</b>

5981



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 3120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 3840 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5981 \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_3 1-10V  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA.

**Light Source and electronics**


2 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,030 m<sup>3</sup>  
Gross weight 5,8 Kg Net weight 2,8 Kg

LED ⓘ IP44 CE UK ENEC Dimmer

5983



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 5120 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 6720 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5983 \_\_ / \_\_

\_\_ / \_1 DALI-2  
\_\_ / \_3 1-10V  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA.

**Light Source and electronics**


2 x LED STRIP 21,6 W 600 mA  
Constant Current 1200 mA  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,046 m<sup>3</sup>  
Gross weight 9,4 Kg Net weight 4,8 Kg

LED ⓘ IP44 CE UK ENEC Dimmer

5985



Finishes	LED Colour Temperature
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 7680 lm
● 23/ __ Warm White (NCS S 0502-Y50R)	/3_ 3500 K - 10080 lm
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90

Control  
5985 \_\_ / \_\_

\_\_ / \_1 \_30 DALI-2 (Remote)  
\_\_ / \_3 \_30 1-10V (Remote)  
\_\_ / \_Z \_30 Casambi (Remote)

**Materials**

Profile and canopy: Aluminum.  
Difuser: PMMA..

**Light Source and electronics**

2 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA Remote  
220-240V 50/60Hz

**Packaging**

2 Boxes  
Total Vol 0,066 m<sup>3</sup>  
Gross weight 13,5 Kg Net weight 6,9 Kg

LED ⓘ IP44 CE UK ENEC Dimmer


## Wall Vanity light



**5987**  
L 121 cm




**5989**  
L 201 cm

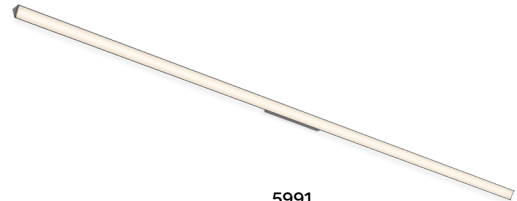

**5991**  
L 301 cm

### 5987



#### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED Colour Temperature

- /1** \_ 2700 K - 1560 lm
  - /3** \_ 3500 K - 1920 lm
- E** >
- CRI >90

#### Control

- 5987** \_ \_ / \_ \_
- 
- \_ \_ / \_ **1** DALI-2
- \_ \_ / \_ **3** 1-10V
- \_ \_ / \_ **Z** \_ **30** Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 10,8 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging


1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 3,1 Kg Net weight 1,6 Kg

#### Notes

Central canopy with module LED inclined 30°



### 5989



#### Finishes

- **11/** \_ \_ Black  
(NCS S 8500-N)
- **23/** \_ \_ Warm White  
(NCS S 0502-Y50R)
- **25/** \_ \_ Beige D1  
(NCS S 4005-Y50R)

#### LED Colour Temperature

- /1** \_ 2700 K - 2560 lm
  - /3** \_ 3500 K - 3360 lm
- E** >
- CRI >90

#### Control

- 5989** \_ \_ / \_ \_
- 
- \_ \_ / \_ **1** DALI-2
- \_ \_ / \_ **3** 1-10V
- \_ \_ / \_ **Z** \_ **30** Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging


1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 4,9 Kg Net weight 2,6 Kg

#### Notes

Central canopy with module LED inclined 30°



5991



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1_ 2700 K - 3840 lm /3_ 3500 K - 5040 lm	<b>5991</b> __ / __
● 23/ __ Warm White (NCS S 0502-Y50R)	E >	__ / _1 DALI-2
● 25/ __ Beige D1 (NCS S 4005-Y50R)	CRI >90	__ / _3 1-10V
		__ / _Z _30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

Light Source and electronics  
1 x LED STRIP 32,4 W 600 mA  
Constant Current 600 mA  
220-240V 50/60Hz

#### Packaging

1 Box 3,3 x 0,1 x 0,1 m  
Vol 0,033 m<sup>3</sup>  
Gross weight 6,9 Kg Net weight 3,6 Kg

#### Notes

Central canopy with module LED inclined 30°

LED IP44 CE UK ENE Dimmer



## Vertical Wall



5993


6,6 x 4,7 x 132 cm



5995

6,6 x 4,7 x 212 cm

### 5993



#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

#### LED Colour Temperature

- /1\_ 2700 K - 1560 lm
- /3\_ 3500 K - 1920 lm
- E →
- CRI >90

#### Control

- 5993 \_\_ / \_\_
- 
- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z \_30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics


1 x LED STRIP 10,8W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

#### Packaging

1 Box 1,5 x 0,1 x 0,1 m  
Vol 0,015 m<sup>3</sup>  
Gross weight 3,1 Kg Net weight 1,6 Kg



### 5995



#### Finishes

- 11/ \_\_ Black (NCS S 8500-N)
- 23/ \_\_ Warm White (NCS S 0502-Y50R)
- 25/ \_\_ Beige D1 (NCS S 4005-Y50R)

#### LED Colour Temperature

- /1\_ 2700 K - 2560 lm
- /3\_ 3500 K - 3360 lm
- E →
- CRI >90

#### Control

- 5995 \_\_ / \_\_
- 
- \_\_ / \_1 DALI-2
- \_\_ / \_3 1-10V
- \_\_ / \_Z \_30 Casambi (Remote)

#### Materials

Profile and canopy: Aluminum.  
Difuser: PMMA.

#### Light Source and electronics

1 x LED STRIP 21,6 W 600 mA  
Constant Current 600 mA  
220~240V 50/60Hz

#### Packaging

1 Box 2,3 x 0,1 x 0,1 m  
Vol 0,023 m<sup>3</sup>  
Gross weight 4,9 Kg Net weight 2,6 Kg

