

Knit

Design by Meike Harde

Form, materiality and tangibility collide with the Knit collection. Its texture is magnetic, calling out for us to touch its surface, to feel its warmth and to keep it close. Light seeps outwards through the fabric and downwards through a translucent screen, softening its luminosity.


Pendant

7450




Ø 45 cm

7455

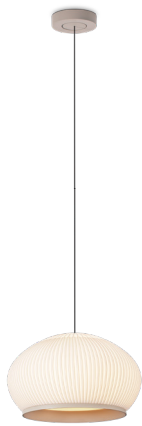

Ø 45 cm

7460

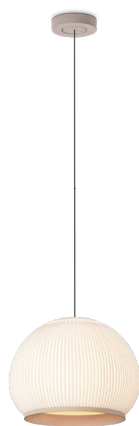

Ø 45 cm

7470



Ø 65 cm

7475



Ø 65 cm

7450

Finishes

● 24/ _ _ Beige M1
(NCS S 2005-Y50R)

LED Colour Temperature

/1 _ 2700 K - 4740 lm



CRI >90

Control

7450 _ _ / _ _

_ _ / _ 1 DALI-2

_ _ / _ 3 1-10V

_ _ / _ Z Casambi


⚡ Select Electrical connection




Surface




Free Wire



Built-in XS




Remote
Micro



Remote
XXS

_10 Surface
_18 Free Wire
_23 Built-in XS
_31 Remote
Micro
_32 Remote
XXS

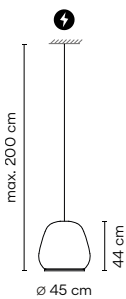

Materials

Fabric shade: PES FR.
Interior diffuser: PE- Polyethylene.
Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics

6 x LED 5,9W 350 mA
Constant Current 1050 mA
110-240V 50/60Hz

Packaging

1 Box 0,55 x 0,55 x 0,65 m
Vol 0,196 m³
Gross weight 6 Kg Net weight 3,7 Kg

Notes

Extra cable length.

LED IP20 CE UK ENEC Bi-volt

7455



Finishes
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E
 CRI >90

Control
 7455 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Select Electrical connection



- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS


Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
 6 x LED 5,9W 350 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,54 x 0,54 x 0,41 m
 Vol 0,119 m³
 Gross weight 5,9 Kg Net weight 3,2 Kg

Notes
 Extra cable length.
 LED IP20 CE UK ENEC Bi-volt

7460

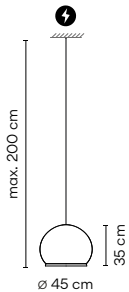


Finishes
 ● 24/ _ _ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E
 CRI >90

Control
 7460 _ _ / _ _
 _ _ / _ 1 DALI-2
 _ _ / _ 3 1-10V
 _ _ / _ Z Casambi

Select Electrical connection

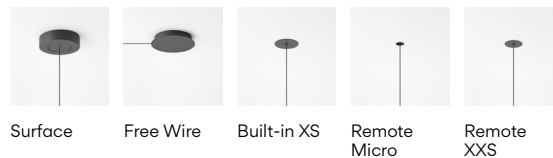

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS


Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
 6 x LED 5,9W 350 mA
 Constant Current 1050 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,54 x 0,54 x 0,41 m
 Vol 0,119 m³
 Gross weight 5,2 Kg Net weight 3,4 Kg

Notes
 Extra cable length.
 LED IP20 CE UK ENEC Bi-volt

7470

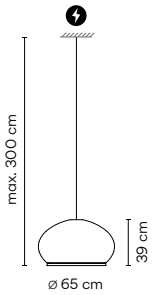


Finishes
 ● 24/ __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E →
 CRI >90

Control
7470 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Select Electrical connection

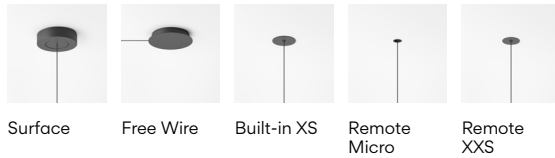

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS


Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
 6 x LED 6,7W 400 mA
 Constant Current 1200 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,59 x 0,78 x 0,78m
 Vol 0,358 m³
 Gross weight 9 Kg Net weight 5,5 Kg

Notes
 Extra cable length.
 LED IP20 CE UK ENE Bi-volt

7475

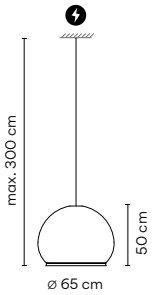


Finishes
 ● 24/ __ Beige M1
 (NCS S 2005-Y50R)

LED Colour Temperature
 /1 _ 2700 K - 4740 lm
 E →
 CRI >90

Control
7475 __ / __
 __ / _ 1 DALI-2
 __ / _ 3 1-10V
 __ / _ Z Casambi

Select Electrical connection

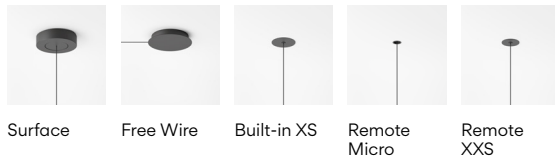

- _10 Surface
- _18 Free Wire
- _23 Built-in XS
- _31 Remote Micro
- _32 Remote XXS

Materials
 Fabric shade: PES FR.
 Interior diffuser: PE- Polyethylene.
 Diffuser: PMMA. Diffuser ring: ABS.

Light Source and electronics
 6 x LED 6,7W 400 mA
 Constant Current 1200 mA
 110-240V 50/60Hz

Packaging
 1 Box 0,80 x 0,80 x 0,77m
 Vol 0,492 m³
 Gross weight 9,5 Kg Net weight 6 Kg

Notes
 Extra cable length.
 LED IP20 CE UK ENE Bi-volt


Select Electrical connection

For each composition, the optimal minimum number of drivers will be delivered.

For Ref. 7450, 7455, 7460, 7470, 7475

Drop ceiling


_31 Remote Micro



Ø 3 cm
height 7 cm

for plaster ceilings.
Black finish.

_32 Remote XXS



Ø 6 cm
height 6 cm

for all types of drop ceilings.
Match with fixture finish.

_23 Built-in XS



Ø 8 cm
height 6 cm

match with fixture finish.

Regular ceiling

_10 Surface



Ø 16 cm

match with fixture finish.

_18 Free Wire



1 wire

Ø 22 cm

you can choose the finish of the canopy among black, white or any colour matching one of the Pendant.



2-3 wires


Ø 36 cm



4 wires

Ø 40 cm

Remote



Built-in

