

Plusminus

Design by Diez Office

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level.

The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.






Easy to design and install


Compose a personalised Plusminus at vibia.com

From scratch

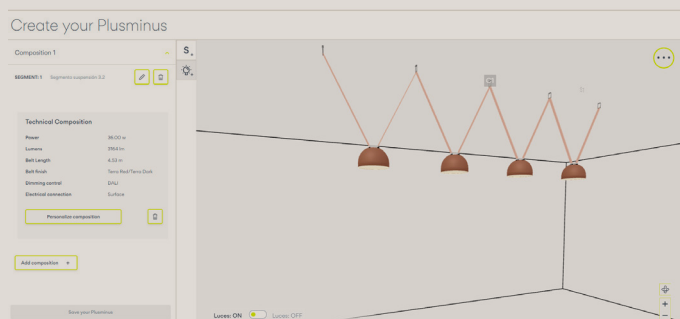

- + Create and compose projects in detail.
- + Draw and customise in 3D to see it in space.
- + Or customise it step by step without drawing.

From a layout

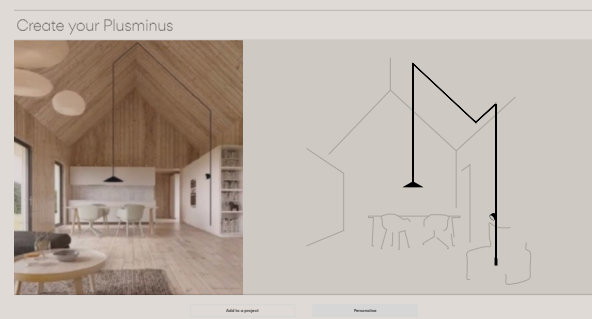

- + Customise and adapt it to the needs of your project.
- + Add it to your project and edit it at any time.
- + More than 100 creations for you.




Easy connection Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.

Luminaire types and lighting effects



Sphere



Volumetric Diffuser

distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Hidden Diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



Cone



Hidden Diffuser


emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Flat diffuser

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



Accent light

emphasizes objects or architectural elements with intensive cones of light. Luminance contrasts attract the eye and bring the illuminated objects into the foreground. The light output is directed towards the object or architectural element and not towards the person, in order to avoid glare.



Linear Diffuser



General lighting

provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



Linear Low UGR



Linear High Efficiency Low Glare

offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19.

Linear High Comfort Low Glare

provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.



Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Sphere




6230
Ø 20 cm



6235
Ø 30 cm

6230



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 846 lm
 - /2 _ 3000 K - 884 lm
 - /3 _ 3500 K - 916 lm
- E** >
- CRI >90

- Control**
- 6230** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)


Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging
1 Box 0,26 x 0,26 x 0,260 m
Vol 0,0175 m³
Gross weight 1,56 Kg Net weight 0,93 Kg



6235



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1 _ 2700 K - 1492 lm
 - /2 _ 3000 K - 1569 lm
 - /3 _ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6235** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
 - _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials
Diffuser: Triplex opal glass.
Body: Aluminum.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging
1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2,50 Kg Net weight 1,80 Kg



Semisphere




6220
Ø 20 cm



6225
Ø 30 cm

6220



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 846 lm
 - /2** _ 3000 K - 884 lm
 - /3** _ 3500 K - 916 lm
- E** >
- CRI >90

Control

6220 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,26 x 0,26 x 0,26 m
Vol 0,0175 m³
Gross weight 1,20 Kg Net weight 0,78 Kg

LED IP20 CE ENEC ETL Bi-volt Dimmer

6225



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

Control

6225 _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

1 Box 0,364 x 0,364 x 0,364 m
Vol 0,0482 m³
Gross weight 2 Kg Net weight 1,5 Kg

LED IP20 CE ENEC ETL Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

Cone




6240
Ø 60 cm



6245
Ø 80 cm

6240



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6240** _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.


Light Source and electronics
1 x LED 16 W 850 mA

Packaging

0,727 x 0,727 x 0,32 m
Vol 0,1691 m³
Gross weight 5 Kg Net weight 2,5 Kg

LED IP20 CE UK ENEC Bi-volt Dimmer

6245



- Finishes**
- **11/** _ _ Black (NCS S 8500-N)
 - **24/** _ _ Beige M1 (NCS S 2005-Y50R)
 - **37/** _ _ Terra Red (NCS S 4040-Y70R)
 - **42/** _ _ Blue M1 (NCS S 5010-B10G)
 - **53/** _ _ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 1492 lm
 - /2** _ 3000 K - 1569 lm
 - /3** _ 3500 K - 1606 lm
- F** >
- CRI >90

- Control**
- 6245** _ _ / _ _

- _ _ / _ **O** On/Off
- _ _ / _ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- _ _ / _ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: Triplex opal glass.

Light Source and electronics
1 x LED 16 W 850 mA

Packaging

1 Box 0,96 x 0,96 x 0,27 m
Vol 0,2488 m³
Gross weight 7 Kg Net weight 3,5 Kg

LED IP20 CE UK ENEC Bi-volt Dimmer

Spotlight



Spot Accent Light
6200 Narrow
Ø 10 cm




Spot Accent Light
6205 Medium
6210 Wide
Ø 10 cm



Spot Flat Diffuser
6215
Ø 10 cm

6200 Narrow



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 846 lm
- /2_ 3000 K - 884 lm
- /3_ 3500 K - 916 lm

E >

CRI >90

Control

6200 __ / __

- __ / __ **O** On/Off
- __ / __ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / __ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.


Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg

LED IP20 Bi-volt Dimmer

6205 Medium



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

LED Colour Temperature

- /1_ 2700 K - 846 lm
- /2_ 3000 K - 884 lm
- /3_ 3500 K - 916 lm

E >

CRI >90

Control

6205 __ / __

- __ / __ **O** On/Off
- __ / __ **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / __ **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg


LED IP20 Bi-volt Dimmer

Luminaire types

It is not possible to order luminaires alone, you need to design your Plusminus on our website vibia.com

6210

Wide



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1_ 2700 K - 846 lm
 - /2_ 3000 K - 884 lm
 - /3_ 3500 K - 916 lm
- LED symbol:
- CRI >90

Control

- 6210 __ / __
- __ / _ 0 On/Off
 - __ / _ F Simultaneous line Push; 1-10V; Casambi; DALI
 - __ / _ Z Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 7,9 W 450 mA


Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg



6215

Flat Diffuser



- Finishes**
- 11/ __ Black (NCS S 8500-N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 37/ __ Terra Red (NCS S 4040-Y70R)
 - 42/ __ Blue M1 (NCS S 5010-B10G)
 - 53/ __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1_ 2700 K - 491 lm
 - /2_ 3000 K - 513 lm
 - /3_ 3500 K - 532 lm
- LED symbol:
- CRI >90

Control

- 6215 __ / __
- __ / _ 0 On/Off
 - __ / _ F Simultaneous line Push; 1-10V; Casambi; DALI
 - __ / _ Z Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics
1 x LED 4,2 W 250 mA

Packaging

1 Box 0,193 x 0,161 x 0,148 m
Vol 0,0046 m³
Gross weight 0,719 Kg Net weight 0,51 Kg




Spotlight - Accent

Narrow

Medium


Wide

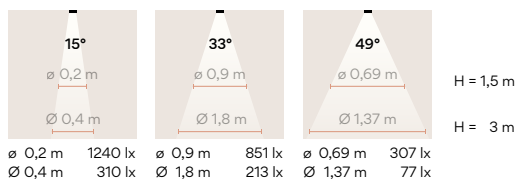

∅ 0,2 m	1240 lx	∅ 0,9 m	851 lx	∅ 0,69 m	307 lx
∅ 0,4 m	310 lx	∅ 1,8 m	213 lx	∅ 1,37 m	77 lx

Spot Accent Light


Spot Flat Diffuser

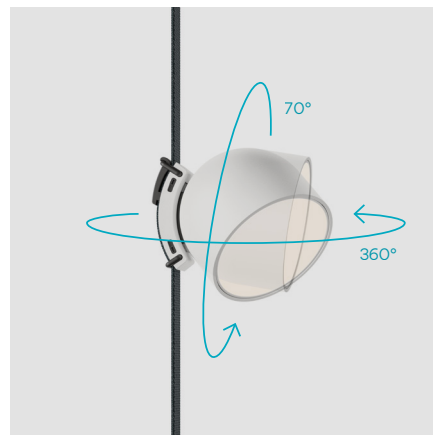

Linear diffuser



6250



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 2544 lm
 - /2** _ 3000 K - 2628 lm
 - /3** _ 3500 K - 2712 lm
- C** >90

Control

- 6250** _ _ / _ _
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
 - _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics


1 x LED STRIP 20,6 W 24 V

Packaging

1 Box 0,06 x 0,06 x 1,25 m
Vol 0,0057 m³
Gross weight 1,5 Kg Net weight 0,72 Kg

LED IP20 CE ENEC ENEC Bi-volt Dimmer

6255



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 5088 lm
 - /2** _ 3000 K - 5256 lm
 - /3** _ 3500 K - 5424 lm
- D** >90

Control

- 6255** _ _ / _ _
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
 - _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PC- Polycarbonate.

Light Source and electronics

1 x LED STRIP 41,3 W 24 V

Packaging


1 Box 0,06 x 0,06 x 2,24 m
Vol 0,0103 m³
Gross weight 2 Kg Net weight 1,45 Kg

LED IP20 CE ENEC ENEC Bi-volt Dimmer


Linear Low UGR - High-Comfort



6260
26,8 x 7 x 3 cm




6265
52,5 x 7 x 3 cm

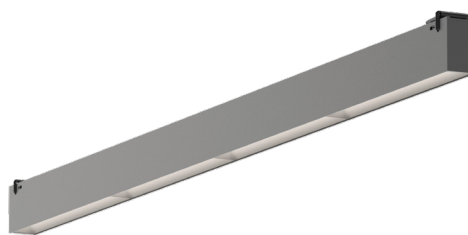

6270
103,7 x 7 x 3 cm



6260



Finishes

- **11/** __ Black
(NCS S 8500-N)
- **24/** __ Beige M1
(NCS S 2005-Y50R)
- **37/** __ Terra Red
(NCS S 4040-Y70R)
- **42/** __ Blue M1
(NCS S 5010-B10G)
- **53/** __ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 1281 lm
- /2** _ 3000 K - 1323 lm
- /3** _ 3500 K - 1366 lm



CRI >90

Control

6260 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19



6265



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2562 lm
 - /2** _ 3000 K - 2647 lm
 - /3** _ 3500 K - 2731 lm
- CRI >90**

Control

6265 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.


Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19



6270



- Finishes**
- **11/** __ Black (NCS S 8500-N)
 - **24/** __ Beige M1 (NCS S 2005-Y50R)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **42/** __ Blue M1 (NCS S 5010-B10G)
 - **53/** __ Green M1 (NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5124 lm
 - /2** _ 3000 K - 5293 lm
 - /3** _ 3500 K - 5462 lm
- CRI >90**

Control

6270 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line Push; 1-10V; Casambi; DALI
- __ / **Z** Casambi integrated on each individual luminaire (P2P)

Materials

Shade: Aluminum.
Diffuser: PET.



Light Source and electronics
1 x LED STRIP 41,3 W 24 V

Packaging


1 Box 0,08 x 0,11 x 1,10 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19




Linear Low UGR - High-Efficiency




6275

26,8 x 7 x 3 cm




6280

52,5 x 7 x 3 cm

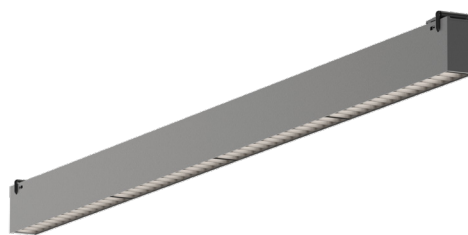


6285

103,7 x 7 x 3 cm



6275



Finishes

- **11/** _ _ Black
(NCS S 8500-N)
- **24/** _ _ Beige M1
(NCS S 2005-Y50R)
- **37/** _ _ Terra Red
(NCS S 4040-Y70R)
- **42/** _ _ Blue M1
(NCS S 5010-B10G)
- **53/** _ _ Green M1
(NCS S 6005-G80Y)

LED Colour Temperature

- /1** _ 2700 K - 1281 lm
 - /2** _ 3000 K - 1323 lm
 - /3** _ 3500 K - 1366 lm
- >
- CRI >90

Control

- 6275** _ _ / _ _
-
- _ _ / _ **O** On/Off
 - _ _ / _ **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
 - _ _ / _ **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics


1 x LED STRIP 10,3 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,32 m
Vol 0,0028 m³
Gross weight 0,8 Kg Net weight 0,41 Kg

Notes

UGR <19



6280



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 2562 lm
 - /2** _ 3000 K - 2647 lm
 - /3** _ 3500 K - 2731 lm
- LED** **CRI >90**

Control

6280 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics
1 x LED STRIP 20,6 W 24 V

Packaging


1 Box 0,08 x 0,11 x 0,57 m
Vol 0,0050 m³
Gross weight 1,5 Kg Net weight 0,89 Kg

Notes

UGR <19



6285



- Finishes**
- **11/** __ Black
(NCS S 8500-N)
 - **24/** __ Beige M1
(NCS S 2005-Y50R)
 - **37/** __ Terra Red
(NCS S 4040-Y70R)
 - **42/** __ Blue M1
(NCS S 5010-B10G)
 - **53/** __ Green M1
(NCS S 6005-G80Y)

- LED Colour Temperature**
- /1** _ 2700 K - 5124 lm
 - /2** _ 3000 K - 5293 lm
 - /3** _ 3500 K - 5462 lm
- LED** **CRI >90**

Control

6285 __ / __

- __ / **O** On/Off
- __ / **F** Simultaneous line
Push; 1-10V;
Casambi; DALI
- __ / **Z** Casambi integrated
on each individual
luminaire (P2P)

Materials

Shade: Aluminum.

Light Source and electronics
1 x LED STRIP 41,3 W 24V

Packaging

1 Box 0,08 x 0,11 x 1,102 m
Vol 0,0096 m³
Gross weight 2,5 Kg Net weight 1,5 Kg

Notes

UGR <19




Accessories Toolbox

Thought out to the smallest detail.
Receive your personalised accessories
toolbox for a quick and easy installation.




Installation accessories


You will receive a personalised accessories toolbox per every composition made at **vibia.com**. The Toolbox includes some extra units for on-site adjustments.

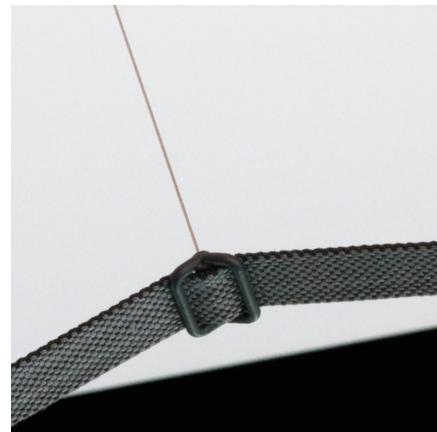


Belt terminations options



B3
Belt End Cap




B4
Double End Cap




B5
Pendant End Cap


Fasten accessories options



F1
Circular Ratchet




F2
Circular Anchor



F3
Belt Support



F4
Counterweight




F5
Corner Support



F6
Freestyle Bar
2 m. bar length
5 m. maximum tensor cable


Tension clips options




T1
Suspension Clip



T2
V-Tension Clip



T3
Parallel Tension Clip S




T4
Parallel Tension Clip M



T5
Cable End Cap



T6
Pendant Cable S



T7
Pendant Cable M

Materials

Counterweight: Cast iron

Finishes

11 Black (NCS S 0300-N)

Electrical connection options

Choose your preferred installation option according to your needs.



Dimming control options


Choose your preferred installation option according to your needs.


Dimming Control	Electrical Connection			
	Surface 25 - 240 W	Built-in 25 - 240 W	Remote 25 - 240 W	Plug Max 60W
On/ Off	✓	✓	✓	✓
Push Switch	—	—	—	✓
Push Simultaneous	✓	✓	✓	—
1-10V Simultaneous	✓	✓	✓	—
DALI Simultaneous	✓	✓	✓	—
Casambi Simultaneous	✓	✓	✓	✓
Casambi integrated on each individual luminaire (P2P)	✓	✓	✓	✓
ProtoPixel Simultaneous	✓	✓	✓	✓
ProtoPixel integrated on each individual luminaire (P2P)	✓	✓	✓	✓

ProtoPixel products are compatible with all other DALI-2 products via a designated gateway (please consult us).

Belt Options Surface Canopy

Choose your preferred installation option according to your needs.

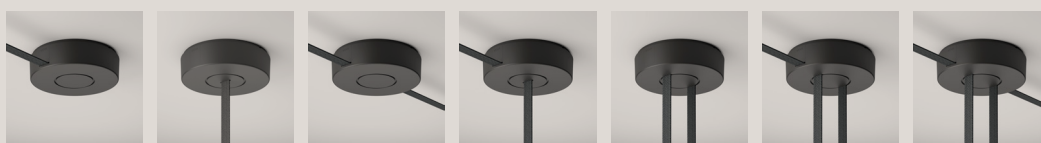



Surface Canopy S
E1 Ø 205 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,9 Kg.

11 Black
(NCS S 8500-N)

Notes

*Available from January 2025.



Surface Canopy M
E2 Ø 260 mm.
Wattage options:
>60W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.


Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,8 Kg.

11 Black
(NCS S 8500-N)

Notes

*Available from January 2025.



Built-in Canopy
E3 Ø 120 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 1,08 - 1,860 Kg.

11 Black
(NCS S 8500-N)


Notes

*Available from January 2025.

25/40/60W



120/240W



Remote Built-in Canopy
E4 Ø 60 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.
Net weight 0,87 - 1,65 Kg.

11 Black
(NCS S 8500-N)


Notes

*Available from January 2025.

25/40/60W



120/240W



Remote Surface Canopy
E5 Ø 60 mm.
Wattage options:
>25W.
<240W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Simultaneous line DALI; 1-10V; Push; Casambi;
ProtoPixel*; Casambi (P2P); ProtoPixel* (P2P).

Body: Aluminum.
Net weight 0,95 - 1,73 Kg.

11 Black
(NCS S 8500-N)


Notes

*Available from January 2025.

25/40/60W



120/240W



Plug-in Floor Switch
E6 Ø 90 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 100-240V. 50/60Hz.

Dimming options:
On/ Off.
Push.
Simultaneous line Casambi; ProtoPixel*.
Casambi (P2P); ProtoPixel* (P2P).

Body: ABS.


11 Black
(NCS S 8500-N)

25/40/60W



Notes

*Available from January 2025.




Wire Connector
E8 Ø 3,1 mm.
Wattage options:
< 60W.

Driver Constant Voltage 42V.
90-305 VAC. 50/60Hz.

Body: ABS.

11 Black
(NCS S 8500-N)



Wire connector
E8 Ø 5,8 mm.
Wattage options:
< 60W.
<240W.