

# FLOS

F0200071 Opal

## Aoy

Designed by Achille Castiglioni, 1975



Halogen - 2 x 100+70W

Table lamp providing diffused light. Clear glass cylindrical lamp body. White opaline glass diffuser and reflector.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607000519
Mounting	Table
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGSA + HSGSA/S
Number of heads	2
Power (W)	100+70

### Physical

Colour	Opal
Length (mm)	300
Cord length (mm)	2350
Net weight (kg)	11.16
Package height (mm)	0
Package width (mm)	0
Package length (mm)	0
Package volume (m3)	0.26
IP internal	20



### Download

[Mounting instructions](#)  PDF

[Spare Parts](#)  PDF

### Photometric Files

[LDT / IES](#)  LDT


### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Schematic light drawing



Luminous flux Luminaire  
2300 lm

### Photometric

Lighting type	Total
Light distribution	Asymmetric

### Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Switch Integrated (Remote Dimmable)
Plug type	Type C
Batteries inside	No

## Bulbs



NOT INCLUDED

RF32563

LED Lamp 11.5W E27 220-240V  
2700K A70



NOT INCLUDED

RF32564

LED Lamp 11.5W E27 220-240V  
3000K A70




NOT INCLUDED

RF32770

LED Lamp 7W lm E27 220-240V  
2700K A60

## Spare Parts

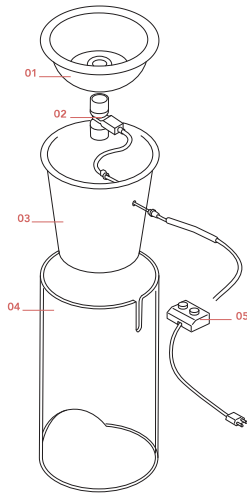

- |     |                              |          |
|-----|------------------------------|----------|
| 01. | Opal crystal reflector       | RF03281  |
| 02. | Assembled lamp holder        | RF04433  |
| 03. | White opaline glass diffuser | RF03282  |
| 04. | Packed cylinder glass        | F0220000 |
| 05. | Assembled switch             | RF04483  |

**DOWNLOAD**



RF03281

Opal crystal reflector



RF04433

Assembled lamp holder



RF03282

White opaline glass diffuser



F0220000

Packed cylinder glass



RF04483

Assembled switch